


Component		Material Grade
1	Body	316.S.S/ASTM A479
2	Spring	304.S.S
3	Ball Poppet	316.S.S/ASTM A479
4	Cover Gland	316.S.S/ASTM A479

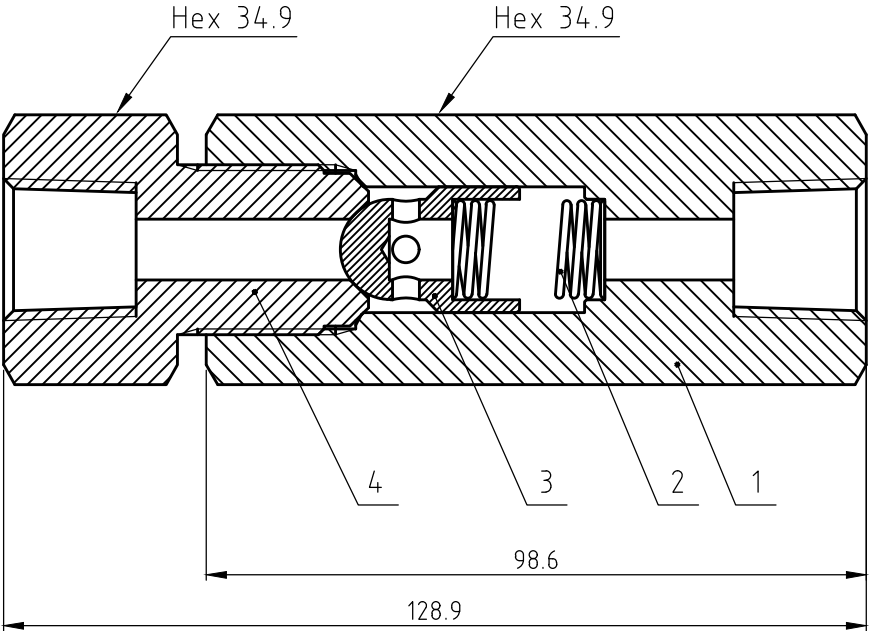


Technical Data:

Max. WP	15000psi @ -110 to 100°F
Temperature Range	-110 to 1200°F
Orifice Size	0.36in (9.12mm)
Inlet Size	1/2 NPT (F)
Outlet Size	1/2 NPT (F)
Cracking Pressure	14 to 26psi (1 to 1.8Bar)

A	Set.11.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Check Valve		
		Model	15CV-FNPT8-B-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

Component		Material Grade
1	Body	316.S.S/ASTM A479
2	Spring	304.S.S
3	Poppet	316.S.S/ASTM A479
4	O Ring	EPDM
5	Cover Gland	316.S.S/ASTM A479

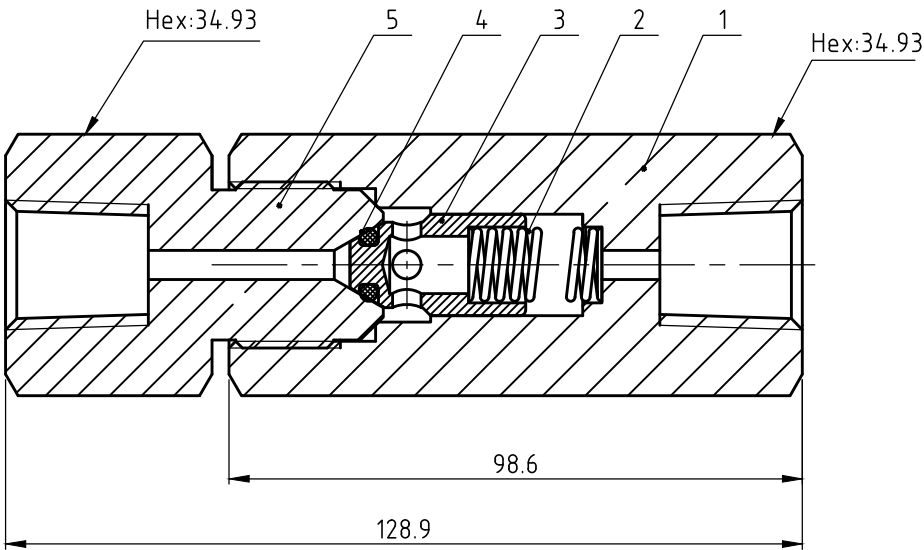


Technical Data:

Max. WP	15000psi (1304Bar)
Temperature Range	0 to 200°F (-17.8 to 93°C)
Orifice Size	0.354in (9.0mm)
Cracking Pressure	14 to 26psi (1 to 1.8Bar)
Connection	1/2 NPT (F)

A	Jul.31.2025				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Check Valve		
		Model	15CV-FNPT8-E-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

Component		Material Grade
1	Body	316.S.S/ASTM A479
2	Spring	304.S.S
3	Ball Poppet	316.S.S/ASTM A479
4	Cover	316.S.S/ASTM A479
5	Cover Gland	316.S.S/ASTM A479

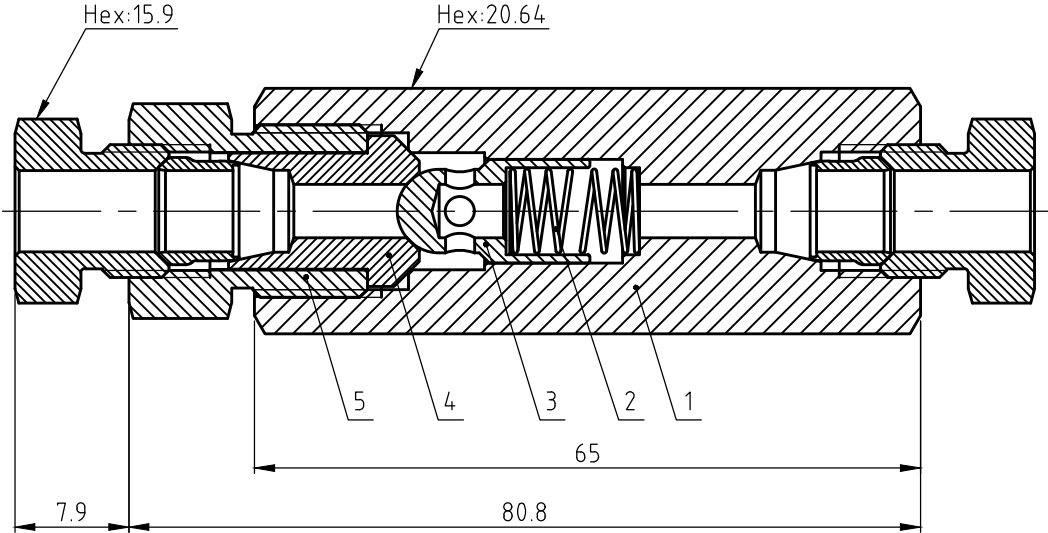


Technical Data:

Max. WP	15000psi (1034Bar)
Temperature Range	0 to 650°F(-18 to 343°C)
Orifice Size	0.188in (4.78mm)
Connection Size	O.D.Ø1/4"

A	Mar.13.2024				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Check Valve		
		Model	15CV-LPF4-B-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

Component		Material Grade
1	Body	316.S.S/ASTM A479
2	Spring	304.S.S
3	Poppet	316.S.S/ASTM A479
4	Inlet Body	316.S.S/ASTM A479

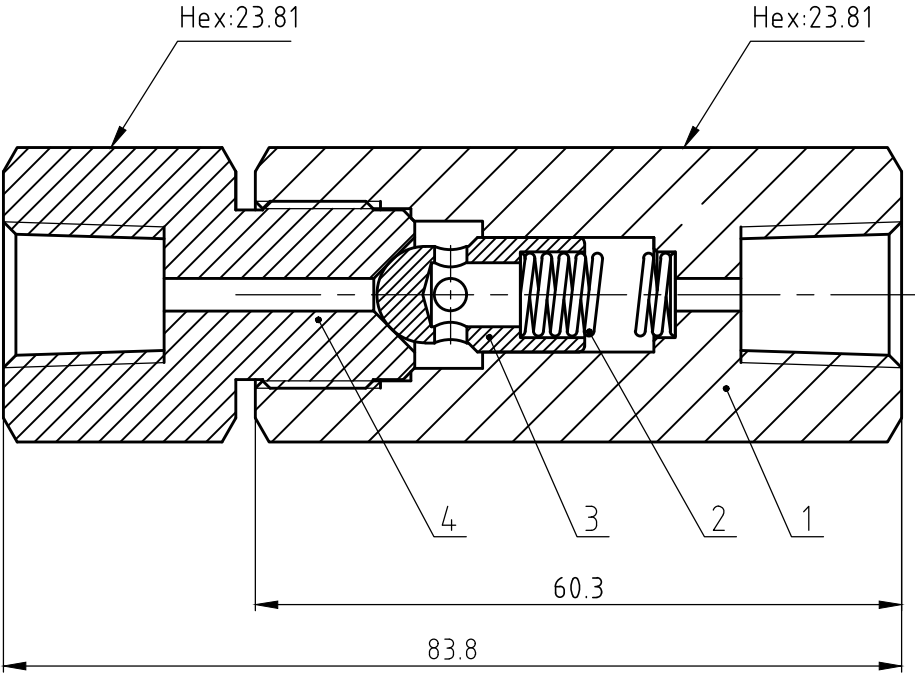


Technical Data:

Max. WP	15000psi (1304Bar)
Temperature Range	0 to 400°F (-17.8 to 204°C)
Orifice Size	0.12in (3.05mm)
Cracking Pressure	14 to 26psi (1 to 1.8Bar)
Connection	1/4 NPT (F)

A	Jan.16.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Check Valve		
		Model	15CV-FNPT4-B-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

Component		Material Grade
1	Body	316.S.S/ASTM A479
2	Spring	X750
3	Poppet	316.S.S/ASTM A479
4	O Ring	HNBR
5	O Ring	HNBR
6	Cover Gland	316.S.S/ASTM A479

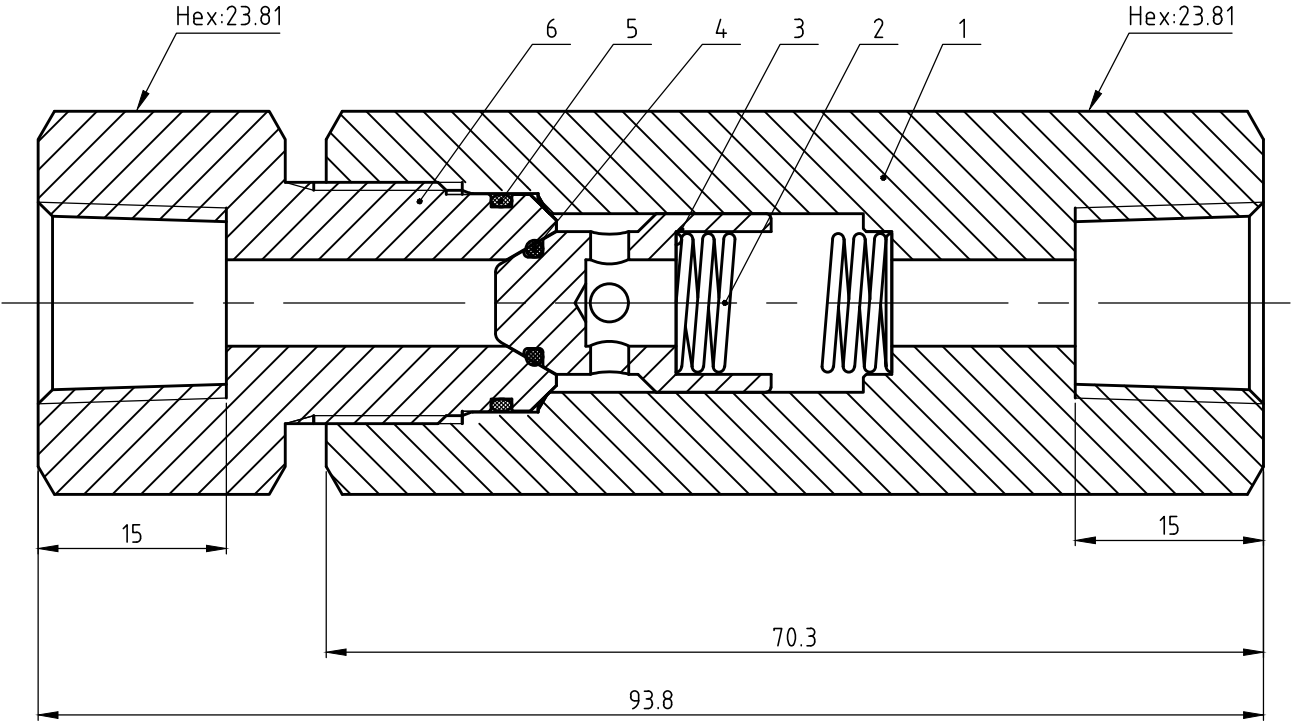

Technical Data:

Max. WP	15000psi (1034Bar)
Temperature Range	0 to 200°F (-17.8 to 93°C)
Orifice Size	0.125in (3.2mm)
Cracking Pressure	14 to 26psi (1 to 1.8Bar)
Connection	1/4 NPT (F)

A	Aug.07.2025				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-I.LOK		Title	Check Valve		
		Model	15SCV-FNPT4-HB-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		