


A	Jul.09.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Metric Tubing		
		Model	MT-6-1.0-6M-TP316		
Format	A4	Unit	mm	View	
Scale	Not 3:1	Page	1 of 1		

Joint Feature:

Material	316 S.S./ASTM A269
----------	--------------------

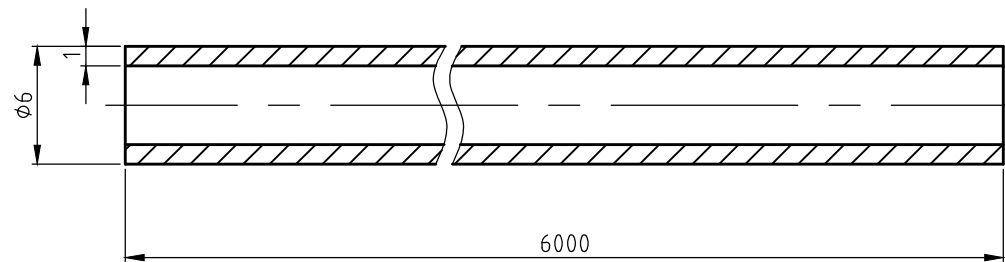

Joint Feature:

Material	316 S.S./ASTM A269
----------	--------------------

A	Jul.09.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Metric Tubing		
		Model	MT-6-1.0-6M-TP316		
Format	A4	Unit	mm	View	
Scale	Not 3:1	Page	1 of 1		



Импульсная трубка серии MT
ПАСПОРТ

MT-6-1.0-6M-TP316L



Производитель:
CIR-LOK
Китай

2023

1. НАЗНАЧЕНИЕ

Трубка из нержавеющей стали цельнотянутая, предназначена для использования в жидкостных и газовых системах различных отраслях промышленности.

2. ОСНОВНЫЕ ТЕХНИЧЕСКИЕ ДАННЫЕ

- Внешний диаметр: 6 мм
- Толщина стенки: 1 мм
- Трубы рассчитаны изготовлены в соответствии со стандартом ASTM A213/A269 / EN ISO 1127
- Трубы рассчитаны для работы при максимальном рабочем давлении 470 бар
- Рабочая температура от -200 до 649 °C
- Материал: Нерж. сталь 316L
- Твердость: не более 80 единиц по шкале Роквелла

3. ИСПЫТАНИЯ

Все трубки испытываются на работу при максимальном давлении.

4. ГАРАНТИЙНЫЕ ОБЯЗАТЕЛЬСТВА

На все поставляемые товары устанавливается гарантийный срок эксплуатации 36 месяцев, с даты отгрузки Товара со склада Поставщика.


Продавец гарантирует Покупателю соответствие качества поставляемого им товара стандарту качества производителя.

Количество: 12 м

Дата отгрузки: в соответствии с отгрузочными документами

Производитель: No.156 Tongxin Road, Chongzhou Economic Development Zone, Chengdu, 611200, China


Представитель производителя в РФ: ООО "ХСМЕ Рус", г. Москва,
тел. +7 (495) 646-0-999

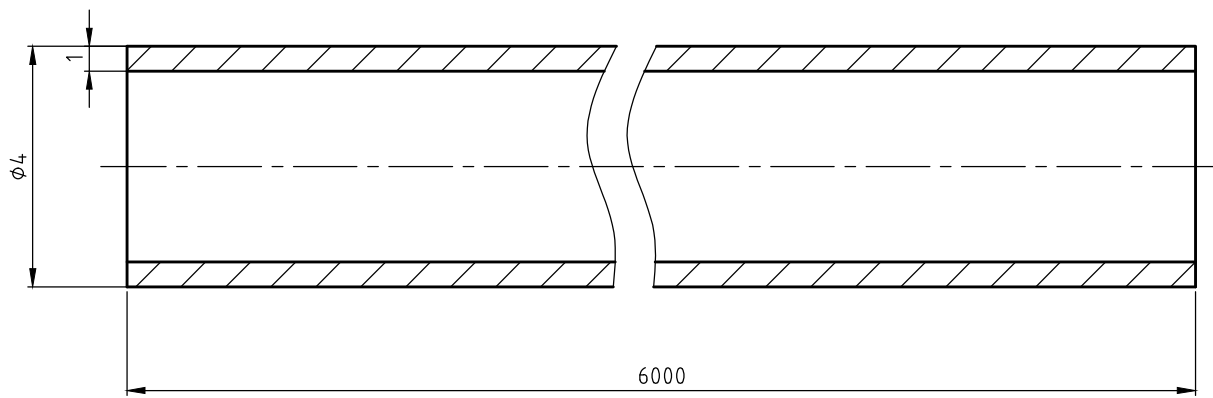

Joint Feature:

Material	PTFE/ASTM D1710
----------	-----------------


A	Nov.17.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	MT-4-10-6M-PTFE		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

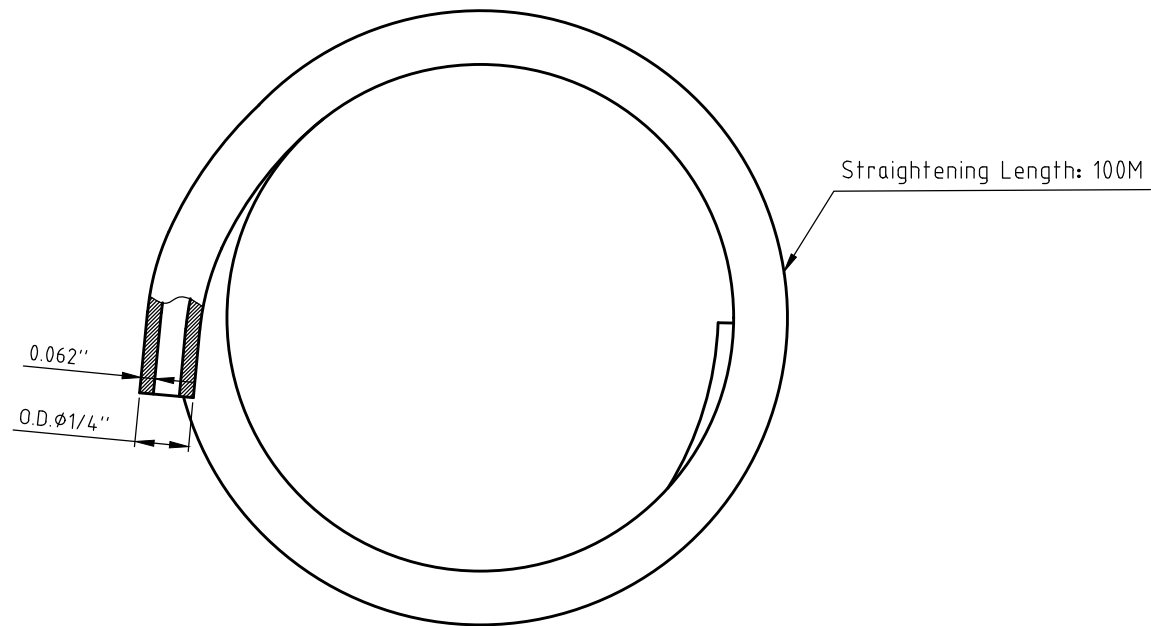

Technical Data:

Material	PTFE/ASTM D1710
----------	-----------------


A	Apr.7.2024				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Tube		
		Model	FT-4-0.062-100M-PTFE		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

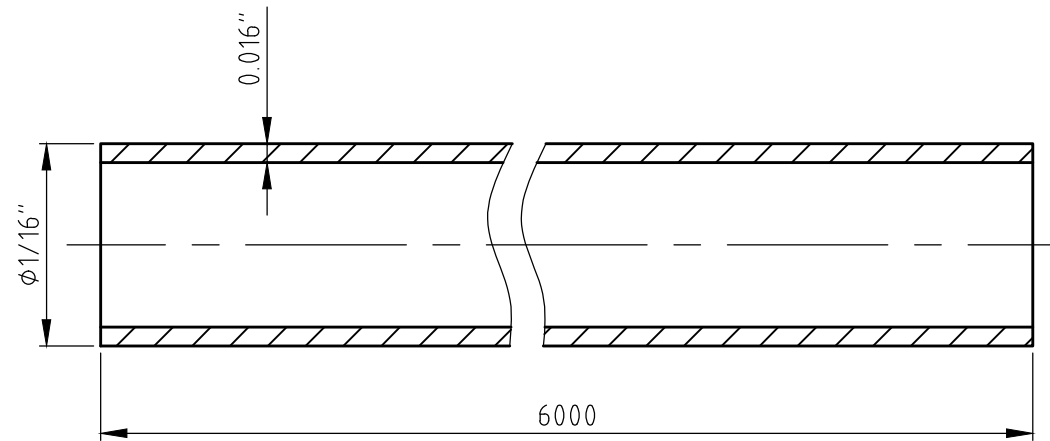

Joint Feature:

Material	316 S.S./ASTM A269
Max. WP	9400psi (648Bar)
Temperature Range	-325°F-1000°F(-198°C-537°C)


A	July.21.2021				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Tube		
		Model	FT-1-0.016-6M-TP316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

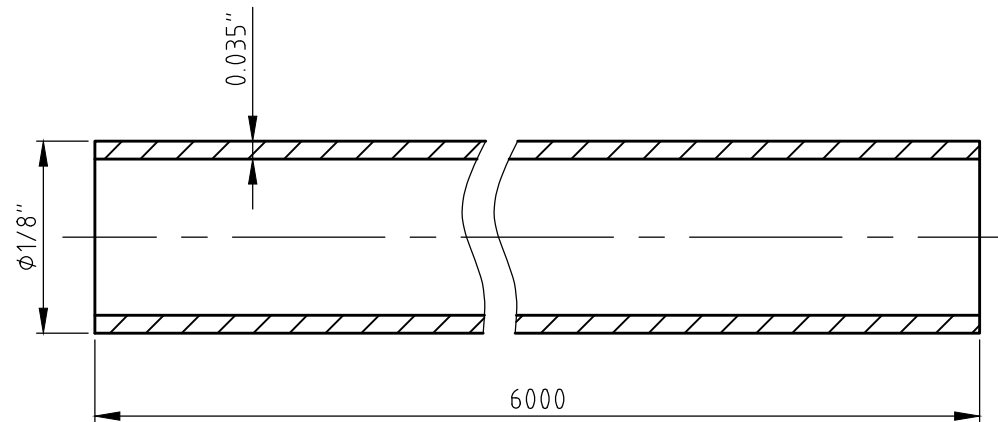

A	Sep.23.2021				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Tube		
		Model	FT-2-0.035-6M-TP316L		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

Joint Feature:


Material	316L SS/ASTM A269
----------	-------------------

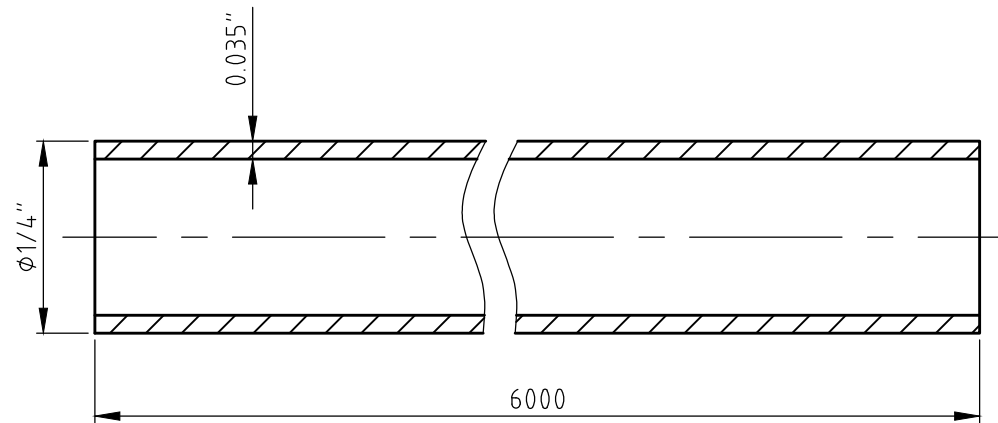

Joint Feature:

Material	316L S.S./ASTM A269
Max.W.P	5190 psi (357 bar)
Max.W.T	-65 to 1000°F(-53 to 537°C)

A	Apr.18.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Tube		
		Model	FT-4-0.035-6M-TP316L		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

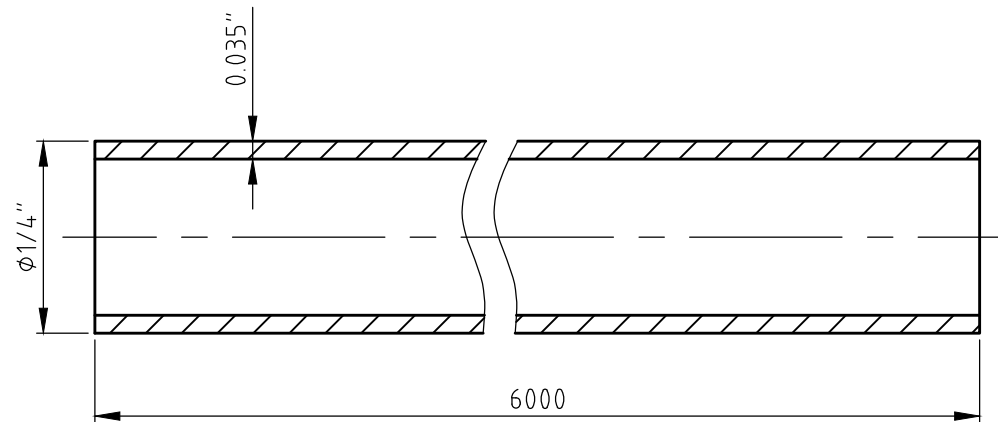

NOTE:

1, Standard surface finish on tubes is a roughness average of 16uin.(0.4um)Ra;

Joint Feature:

Material	316L S.S./ASTM A269
Max.W.P	5190 psi (357 bar)
Max.W.T	-65 to 1000°F(-53 to 537℃)

A	Apr.18.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Tube		
		Model	FT-4-0.035-6M-TP316L-BA		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		