



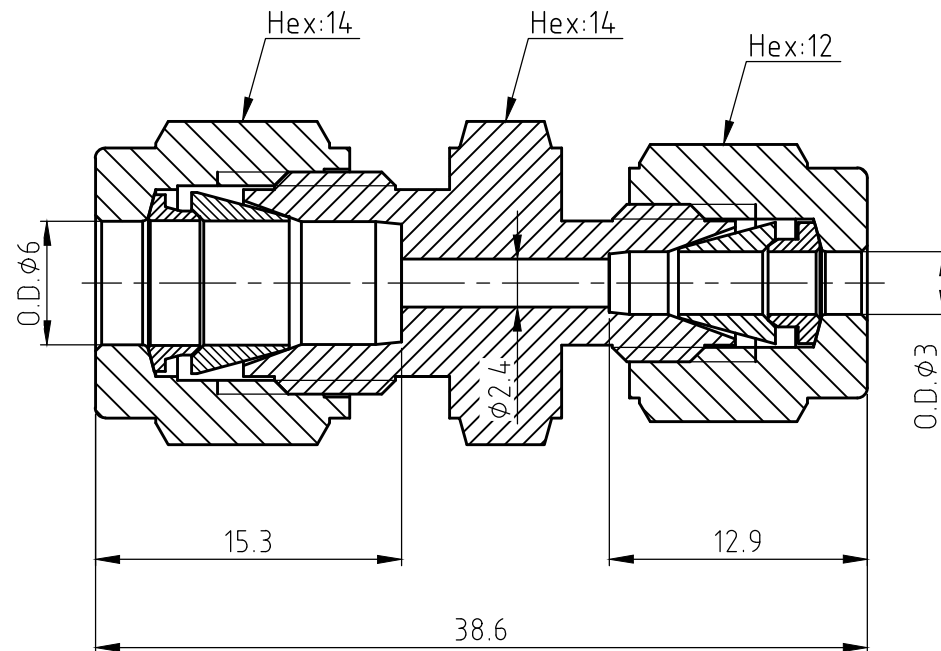

Technical Data:

Material	316 S.S./ASTM A479
----------	--------------------


A	Sep.23.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M6-U-M3-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

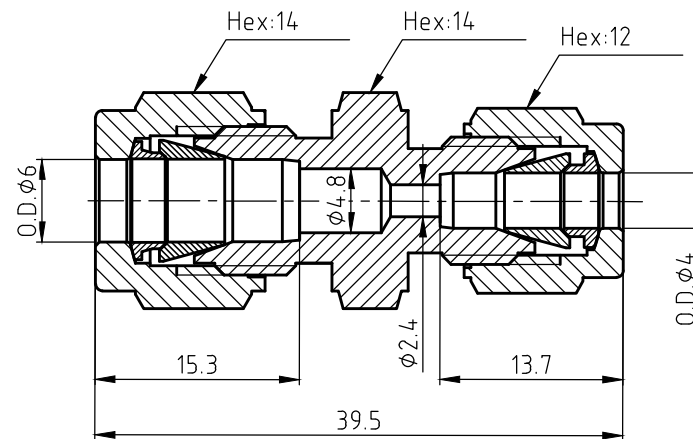

Joint Feature:

Material 316 S.S./ASTM A479


A	Nov.17.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M6-U-M4-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

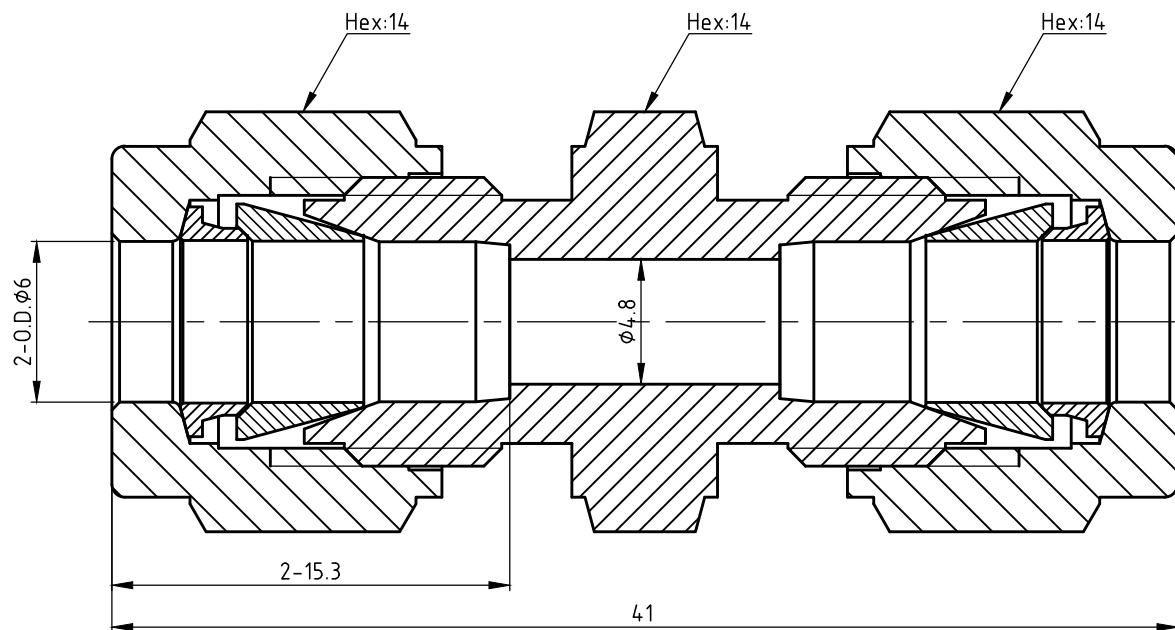

Technical Data:

Material	316 S.S/ASTM A479
----------	-------------------


A	Sep.08.2021				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M6-U-M6-316		
Format	A4	Unit	mm	View	
Scale	Not 3:1	Page	1 of 1		

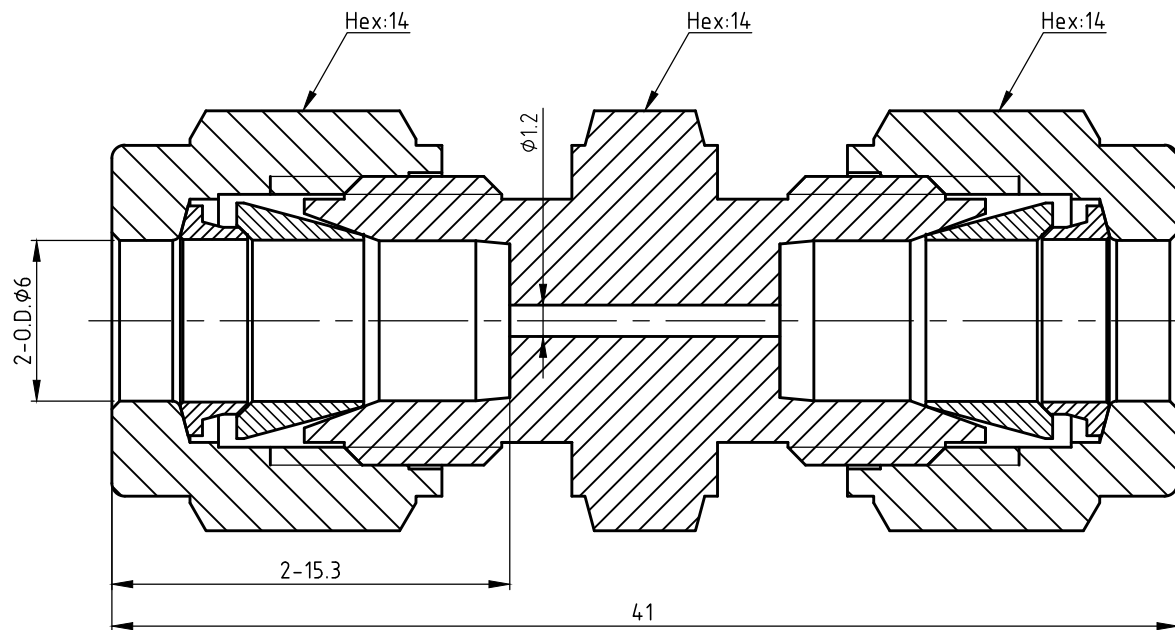

Technical Data:

Material	316 S.S./ASTM A479
----------	--------------------


A	Oct.12.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M6-U-M6-316-ED801		
Format	A4	Unit	mm	View	
Scale	Not 3:1	Page	1 of 1		

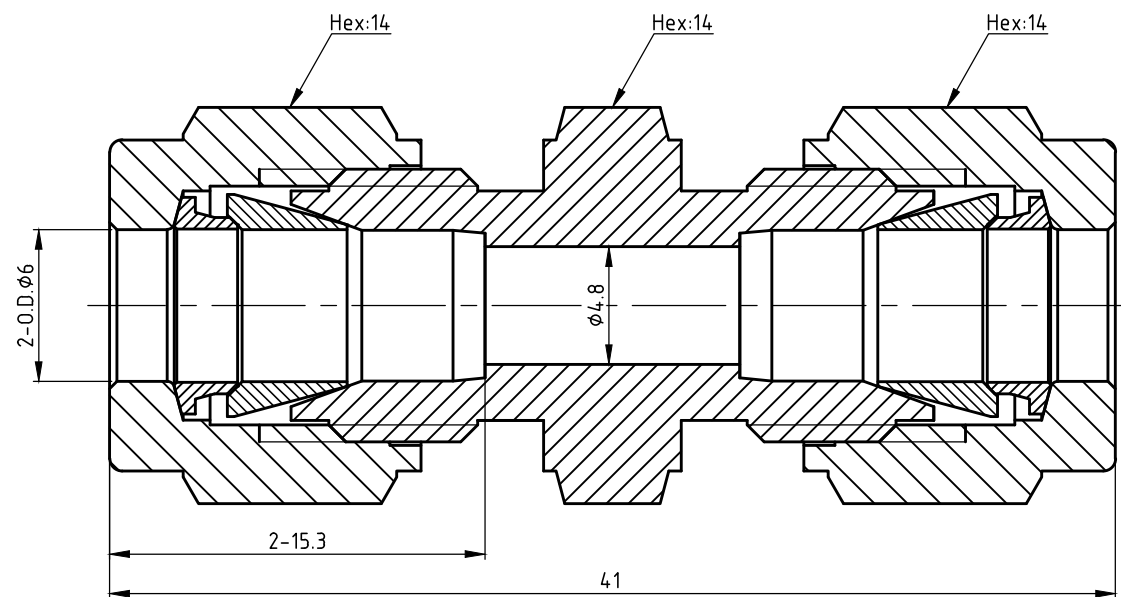

Joint Feature:

Material	316 S.S./ASTM A479
----------	--------------------


A	Feb.08.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M6-U-M6-316-NACE		
Format	A4	Unit	mm	View	
Scale	Not 3:1	Page	1 of 1		

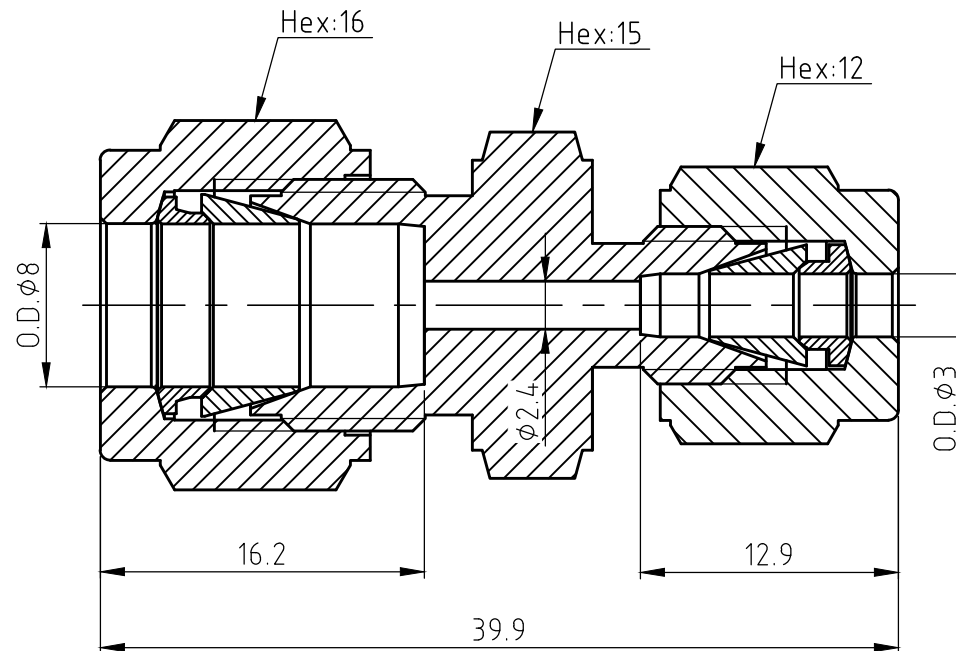

Technical Data:

Material	316 S.S./ASTM A479
----------	--------------------


A	Sep.23.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M8-U-M3-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

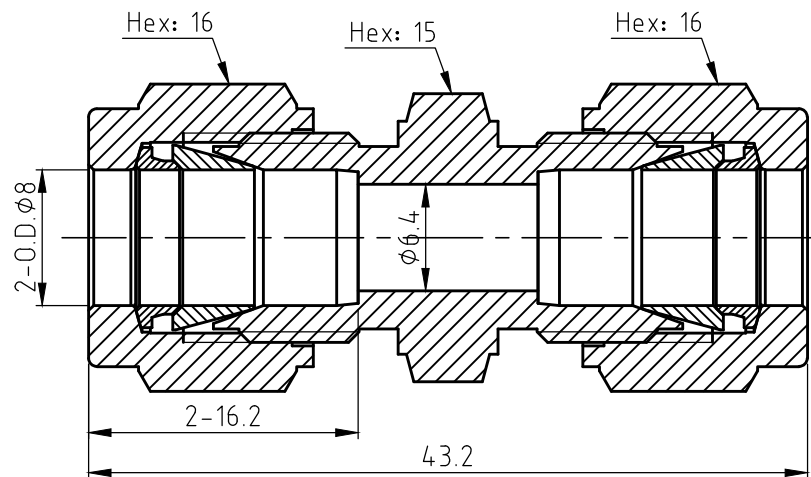

Joint Feature:

Material	316 SS/ASTM A479
Max.working pressure	7500Psi (520Bar)
Temperature range	-325°F-1000°F(-198℃-537℃)


A	Mar.21.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M8-U-M8-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

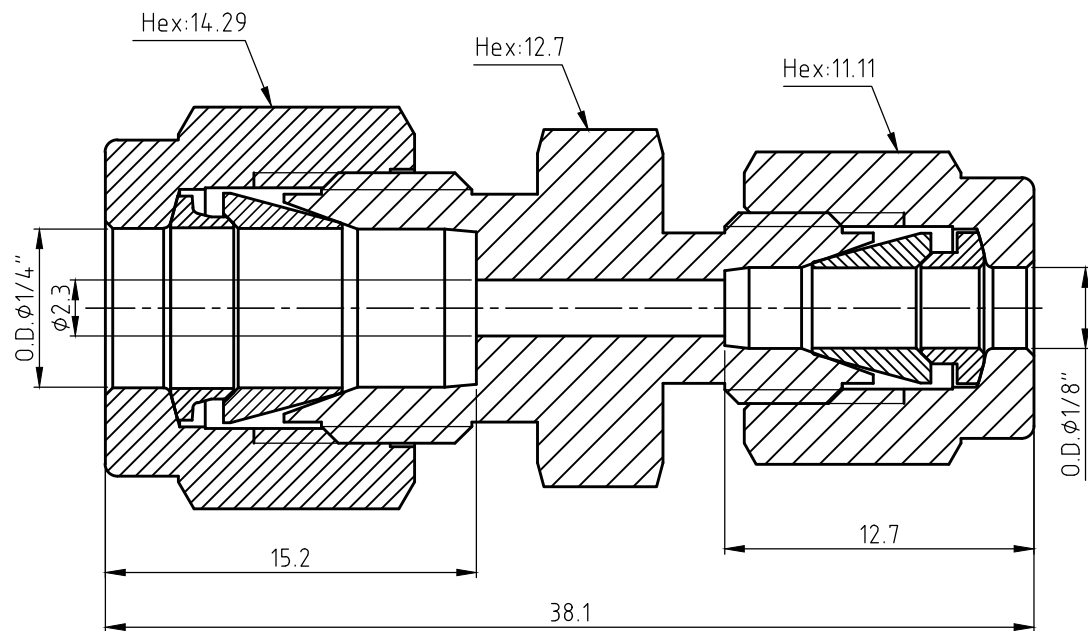

Joint Feature:

Material	316 S.S./ASTM A479
Max. WP	10200psi (703Bar)
Temperature Range	-325°F-1000°F(-198°C-537°C)


A	July.21.2021				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	F4-U-F2-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

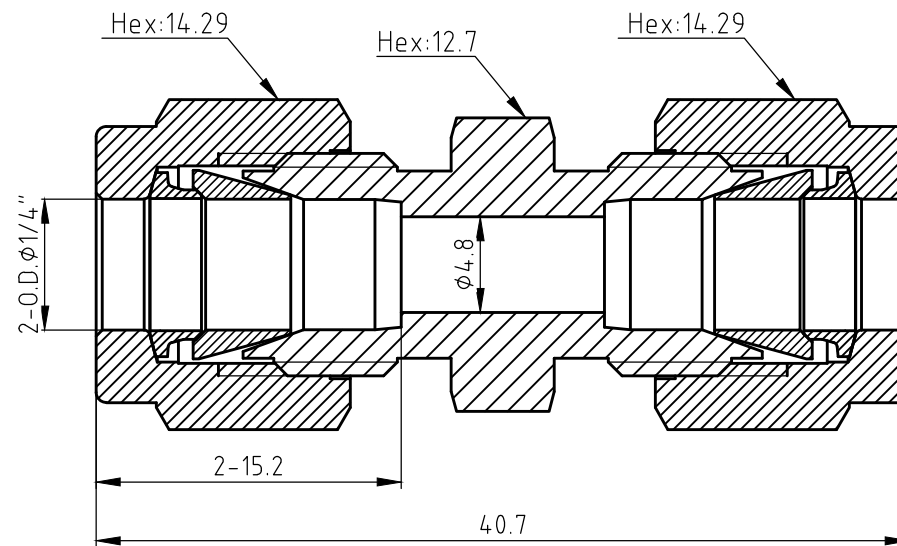

A	Nov.03.2021				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	F4-ME-NPT4-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

Joint Feature:


Material	316 S.S./ASTM A479
----------	--------------------

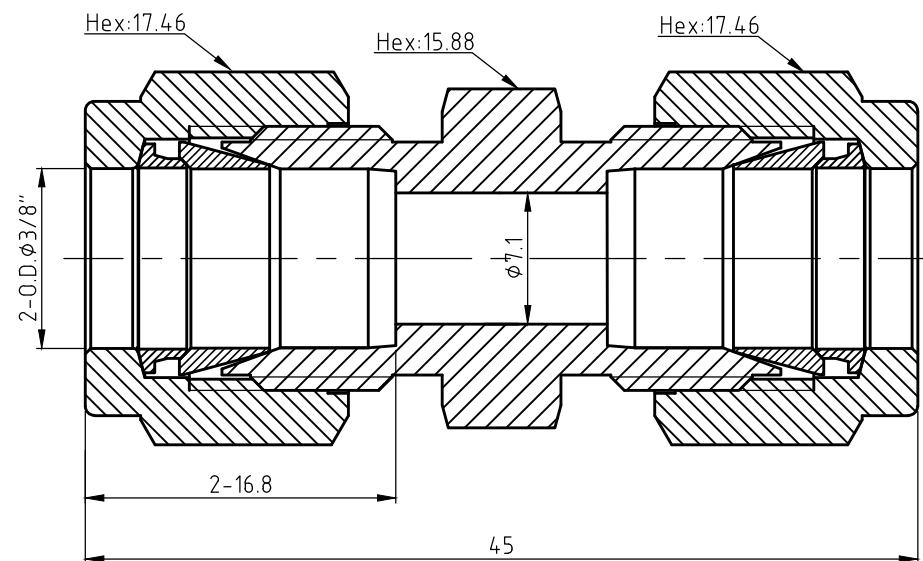

Technical Data:

Material	316 S.S./ASTM A479
Maximum Working temperature	-65 to 1000°F(-53 to 537°C)
Maximum Working Pressure	7500psig(517bar)

A	Apr.03.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	F6-U-F6-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

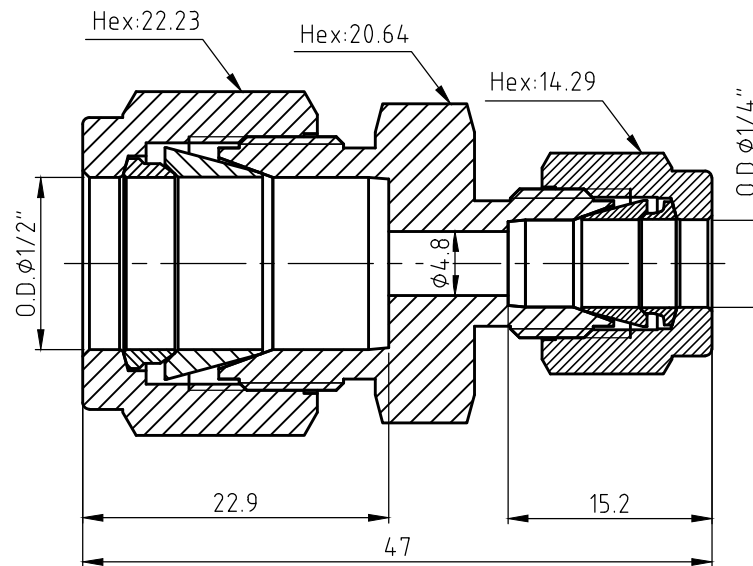


Pressure vs. Temperature Ratings:

Temperature °F (°C)	Working Pressure psig (bar)	Temperature °F (°C)	Working Pressure psig (bar)
-127 (-196) to 100 (37)	6700 (461)	700 (371)	5460 (376)
200 (93)	6700 (461)	800 (426)	5360 (369)
300 (148)	6700 (461)	900 (482)	5226 (360)
400 (204)	6432 (443)	1000 (537)	5092 (351)
500 (260)	6030 (415)	1100 (593)	4154 (286)
600 (315)	5695 (392)	1200 (649)	2479 (170)

Joint Feature:

Material	316 S.S./ ASTM A479
----------	---------------------


B	Nov.21.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	F8-U-F4-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

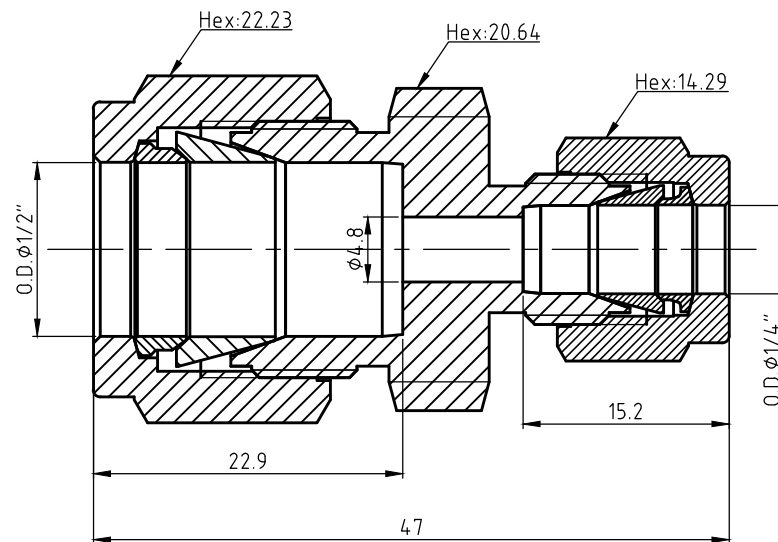

Joint Feature:

Material	316 S.S./ASTM A479
Max. WP	6700psi (462Bar)
Temperature Range	-325°F-1000°F(-198°C-537°C)


A	Aug.11.2021				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	F8-U-F4-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

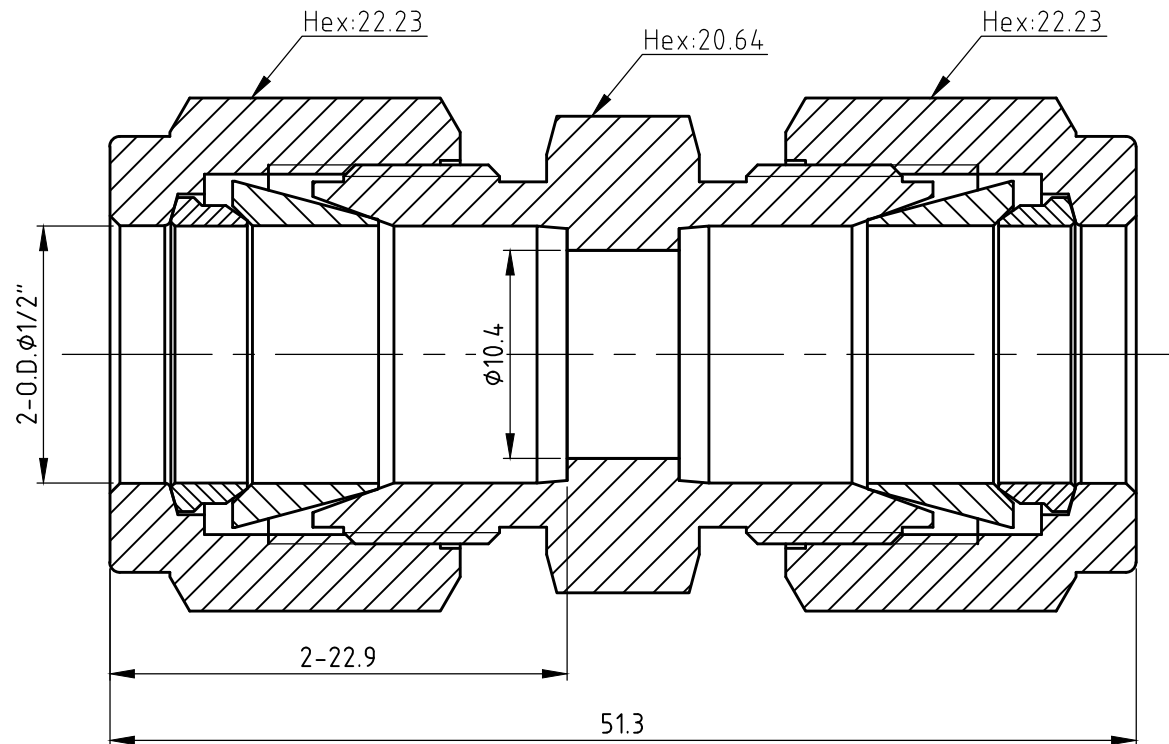

Technical Data:

Material	316 S.S./ASTM A479
Maximum Working temperature	-65 to 1000°F(-53 to 537°C)
Maximum Working Pressure	6700psig(461bar)

A	Apr.03.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	F8-U-F8-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

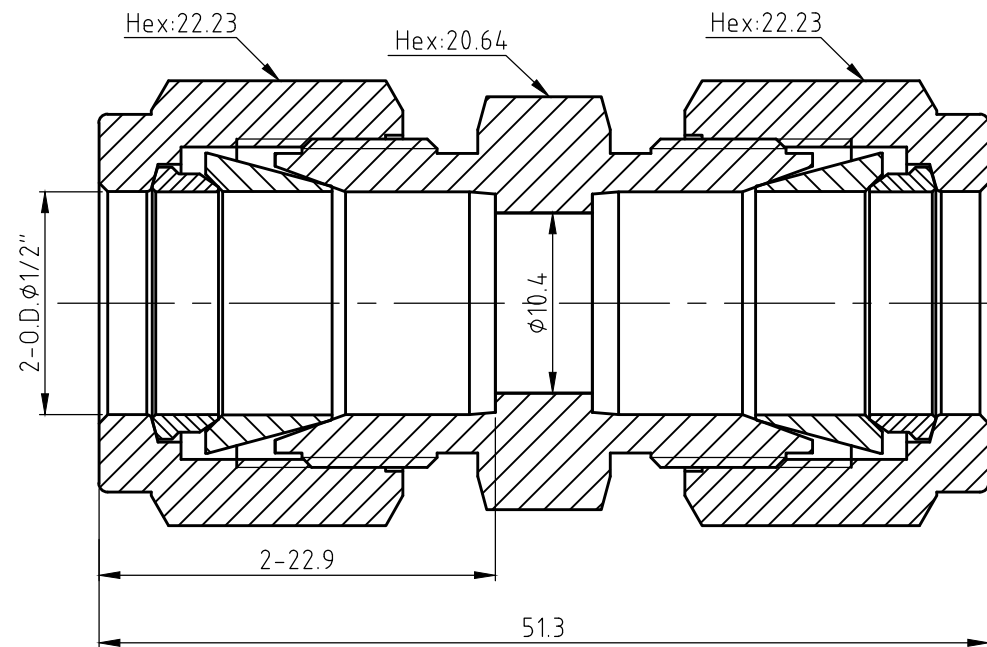


Note: Hydrogen sulfide environment for products.
Standard of material execution: NACE MR 0175

Technical Data:

Material	316 S.S./ASTM A479
----------	--------------------


A	Feb.26.2021				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	F8-U-F8-316-NACE		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

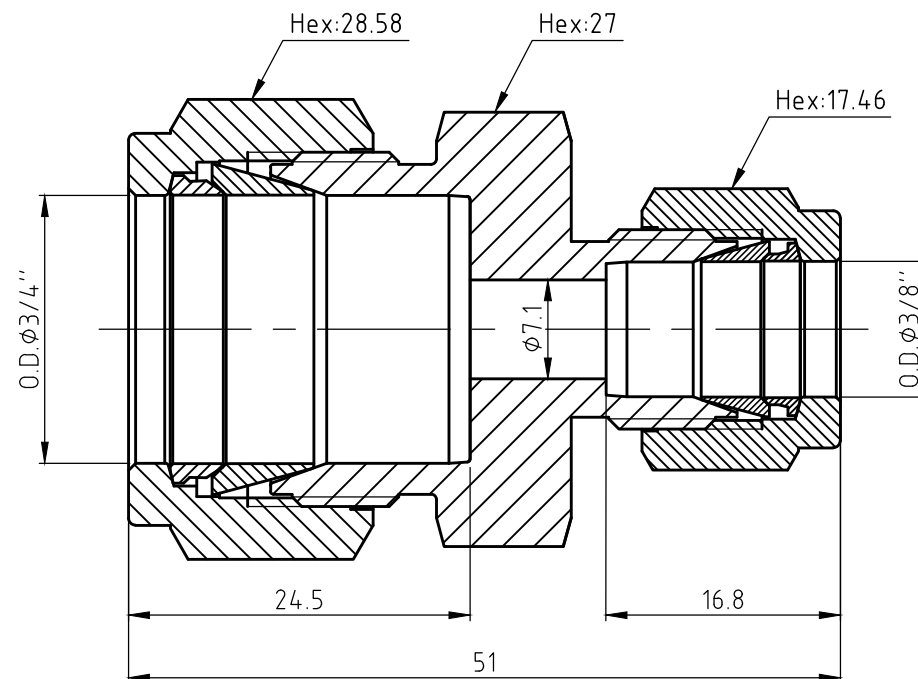

Joint Feature:

Material	316 S.S./ASTM A479
----------	--------------------

A	Jul.26.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	F12-U-F6-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

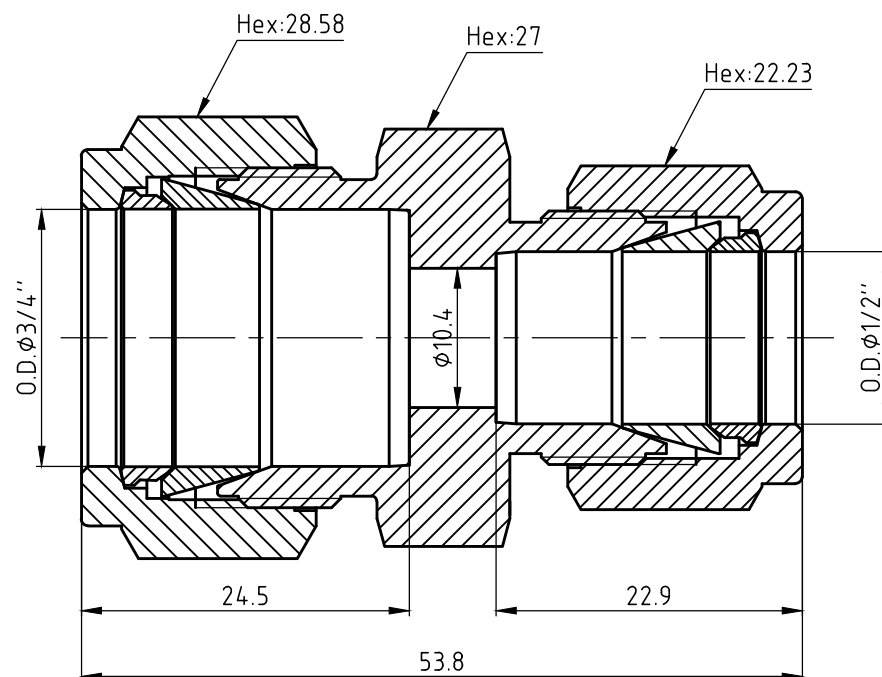


Pressure vs. Temperature Ratings:

Temperature °F (°C)	Working Pressure psig (bar)	Temperature °F (°C)	Working Pressure psig (bar)
-127 (-196) to 100 (37)	5800 (399)	700 (371)	4727 (325)
200 (93)	5800 (399)	800 (426)	4640 (319)
300 (148)	5800 (399)	900 (482)	4524 (311)
400 (204)	5568 (383)	1000 (537)	4408 (303)
500 (260)	5220 (359)	1100 (593)	3596 (247)
600 (315)	4930 (339)	1200 (649)	2146 (147)

Joint Feature:

Material	316 S.S./ASTM A479
----------	--------------------


B	Nov.21.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	F12-U-F8-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

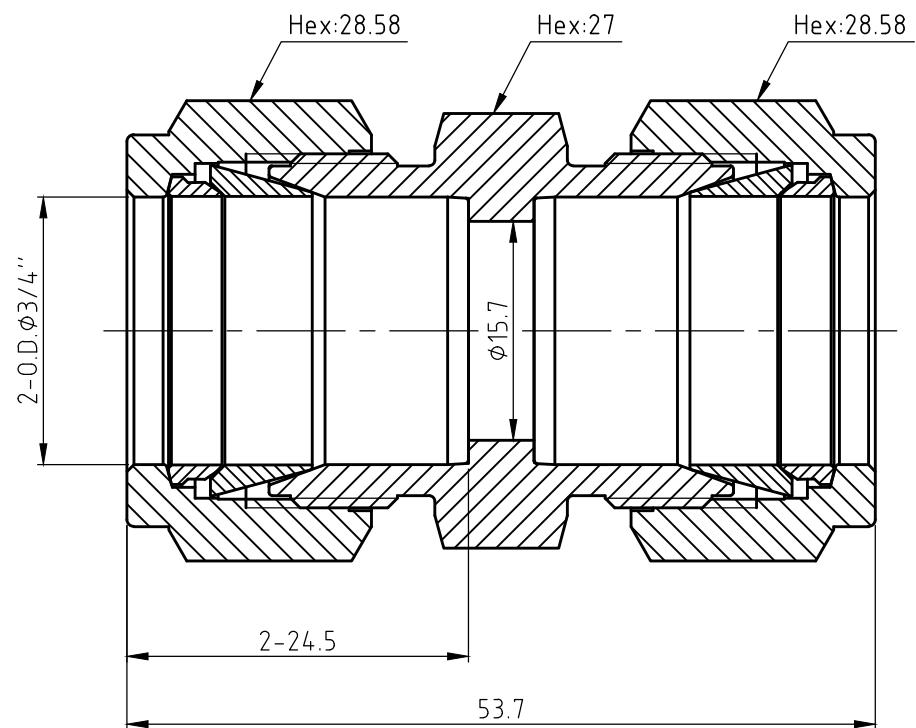

Joint Feature:

Material	316 S.S./ASTM A479
Maximum Working Pressure	5800psi @ -20 to 100°F (399bar @ -28 to 37°C)
Maximum Working Temperature	-20 to 1000°F(-28 to 537°C)


A	Jul.04.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	F12-U-F12-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

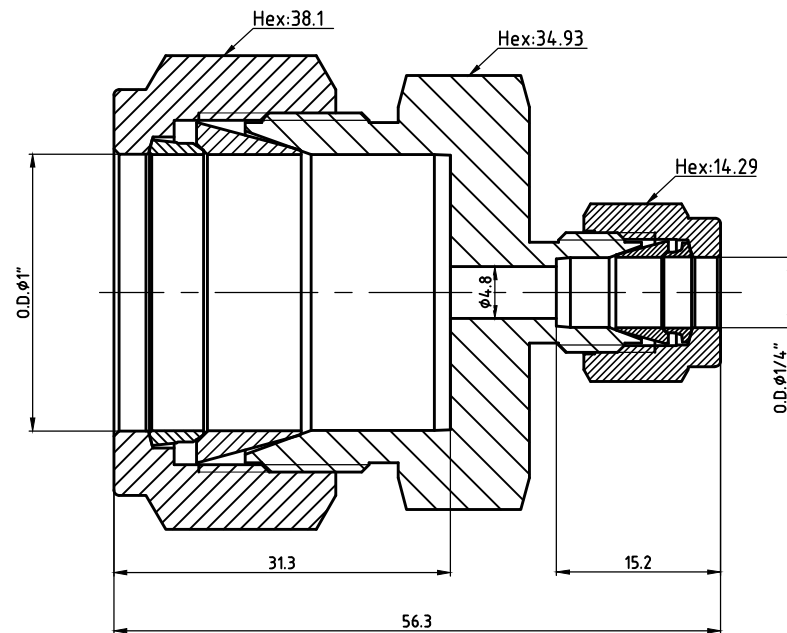

Joint Feature:

Material 316 S.S./ASTM A479


A	Jul.10.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	F16-U-F4-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

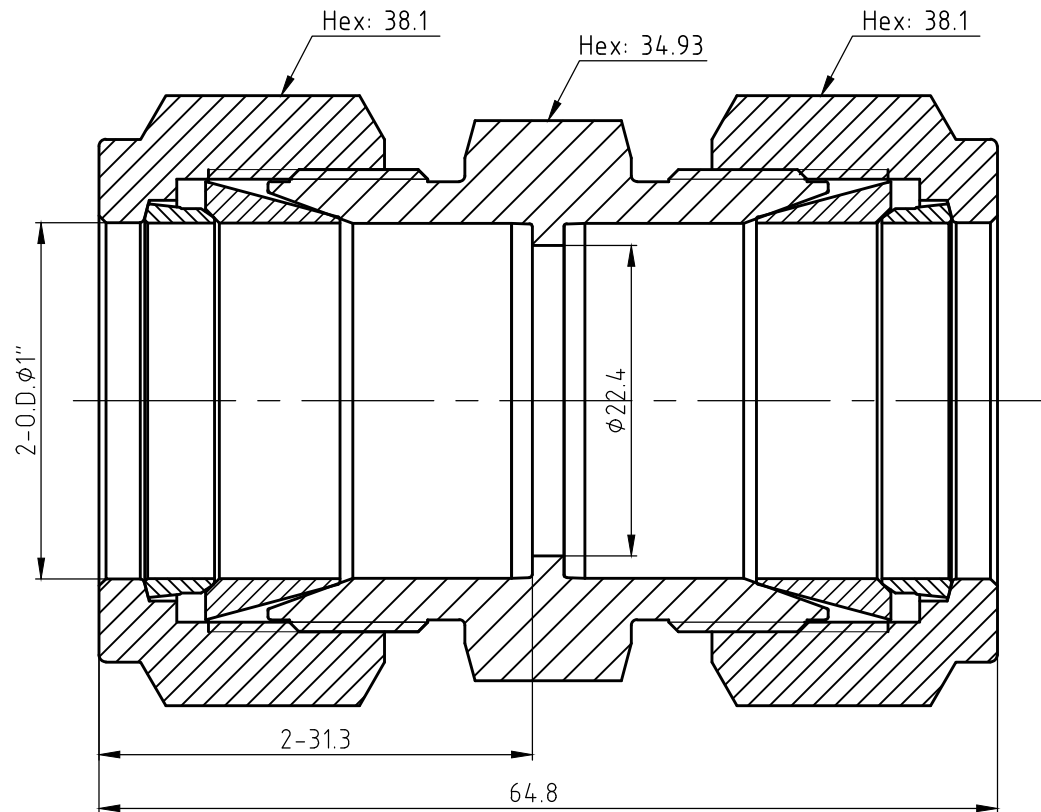

Technical Data:

Material	316 S.S./ASTM A479
Maximum Working temperature	-65 to 1000°F(-53 to 537°C)
Maximum Working Pressure	4700psig(324bar)


A	Apr.03.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	F16-U-F16-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

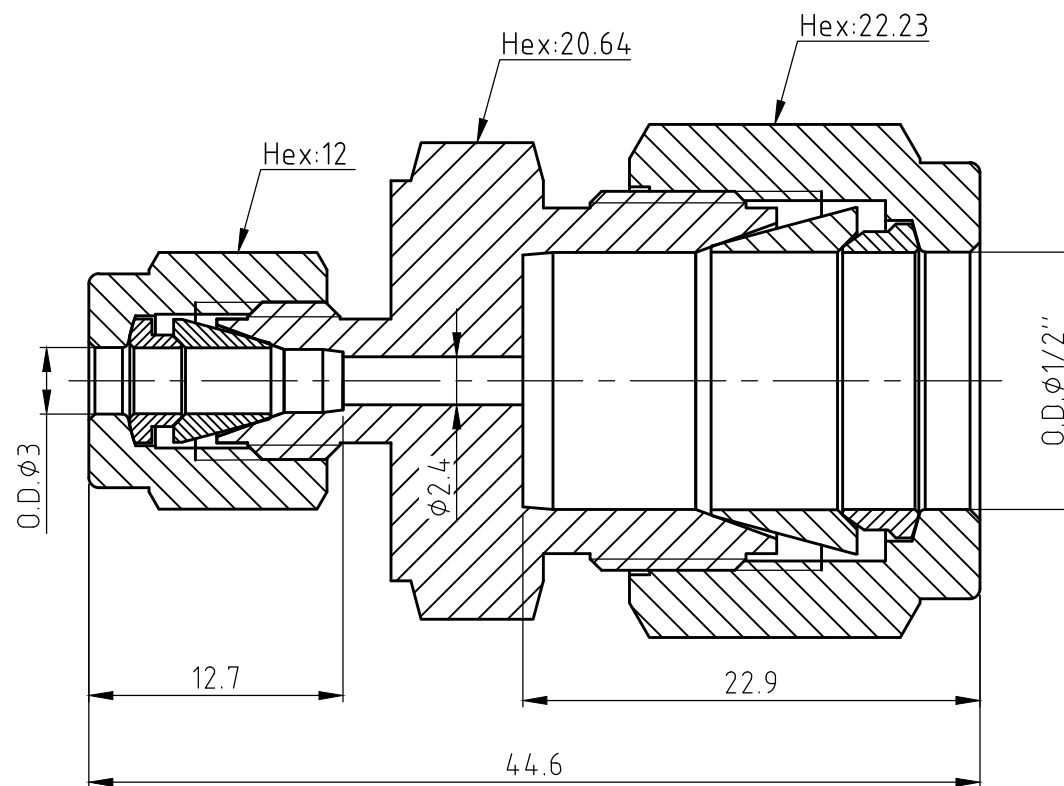

Technical Data:

Material	316 S.S./ASTM A479
----------	--------------------


A	Sep.23.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M3-U-F8-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

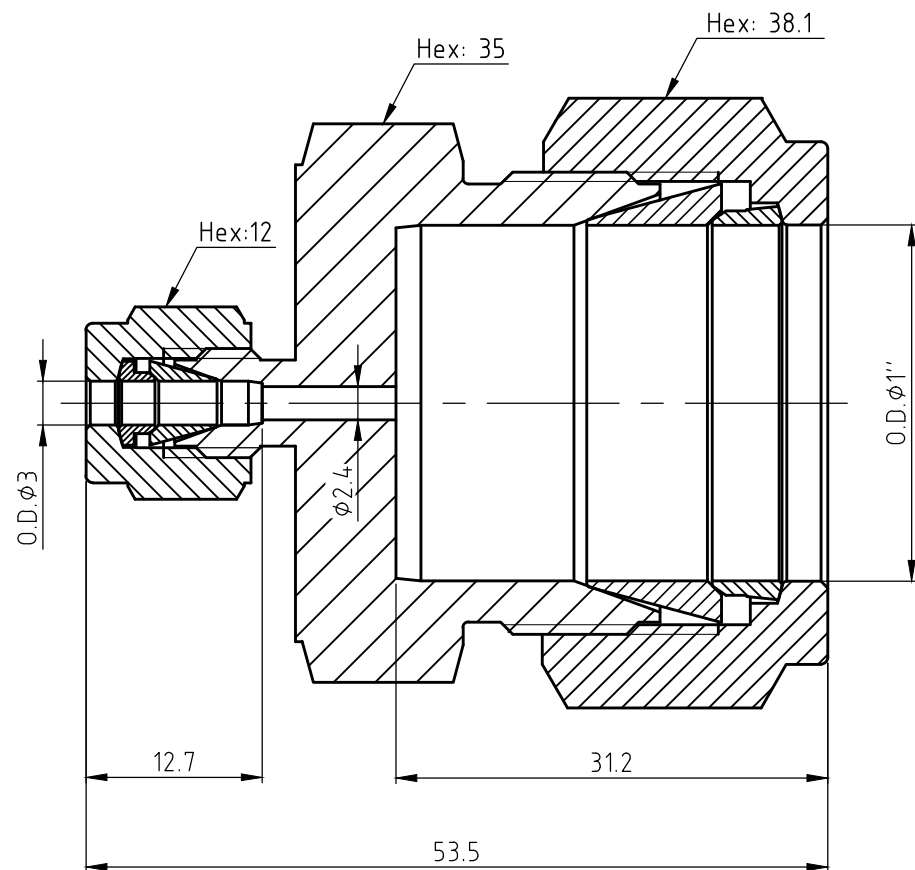

Technical Data:

Material	316 S.S./ASTM A479
----------	--------------------


A	Sep.23.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M3-U-F16-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

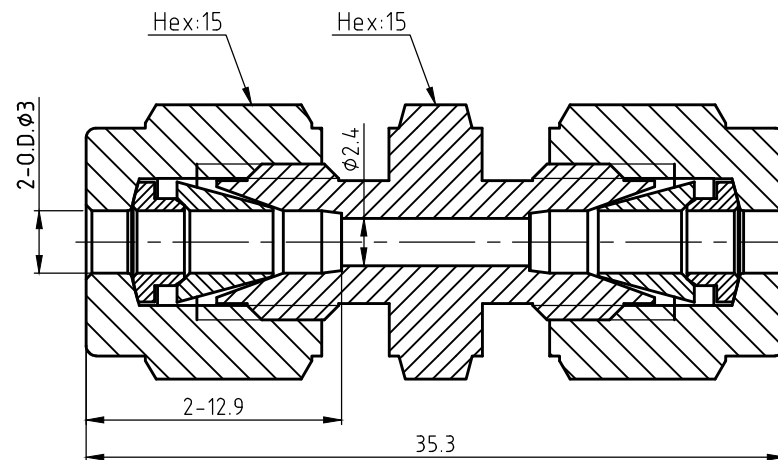

A	Oct.19.2021				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M3-U-M3-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

Joint Feature:


Material 316 S.S./ASTM A479

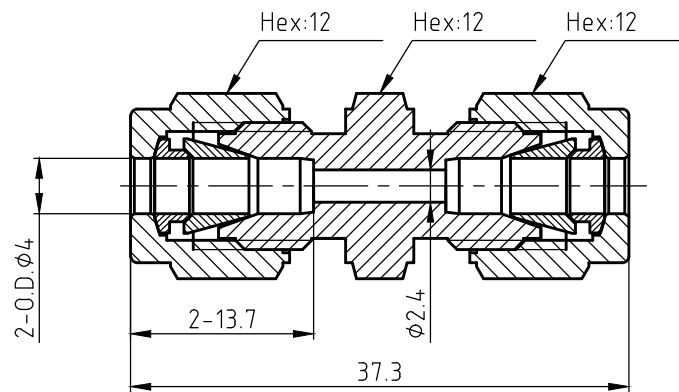

Joint Feature:

Material	316 S.S./ASTM A479
----------	--------------------


A	Nov.17.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M4-U-M4-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

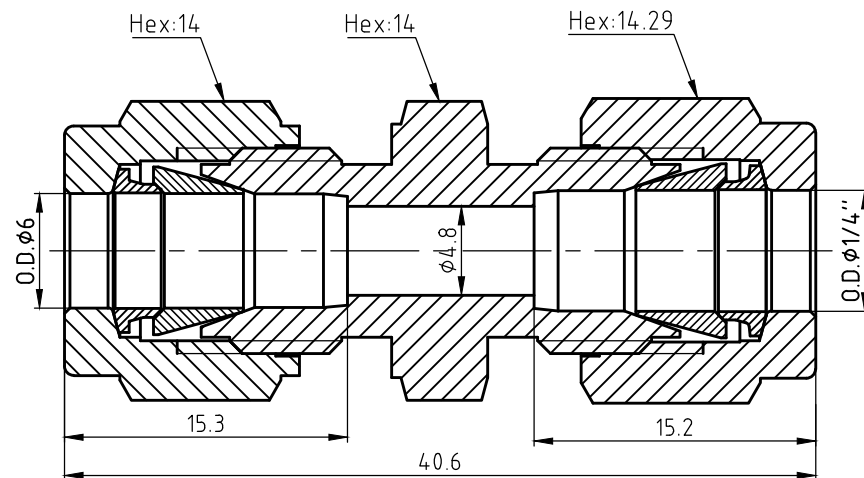

A	Feb.08.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M6-U-F4-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

Joint Feature:


Material	316 S.S/ASTM A479
Max working pressure	10200Psi (703bar)

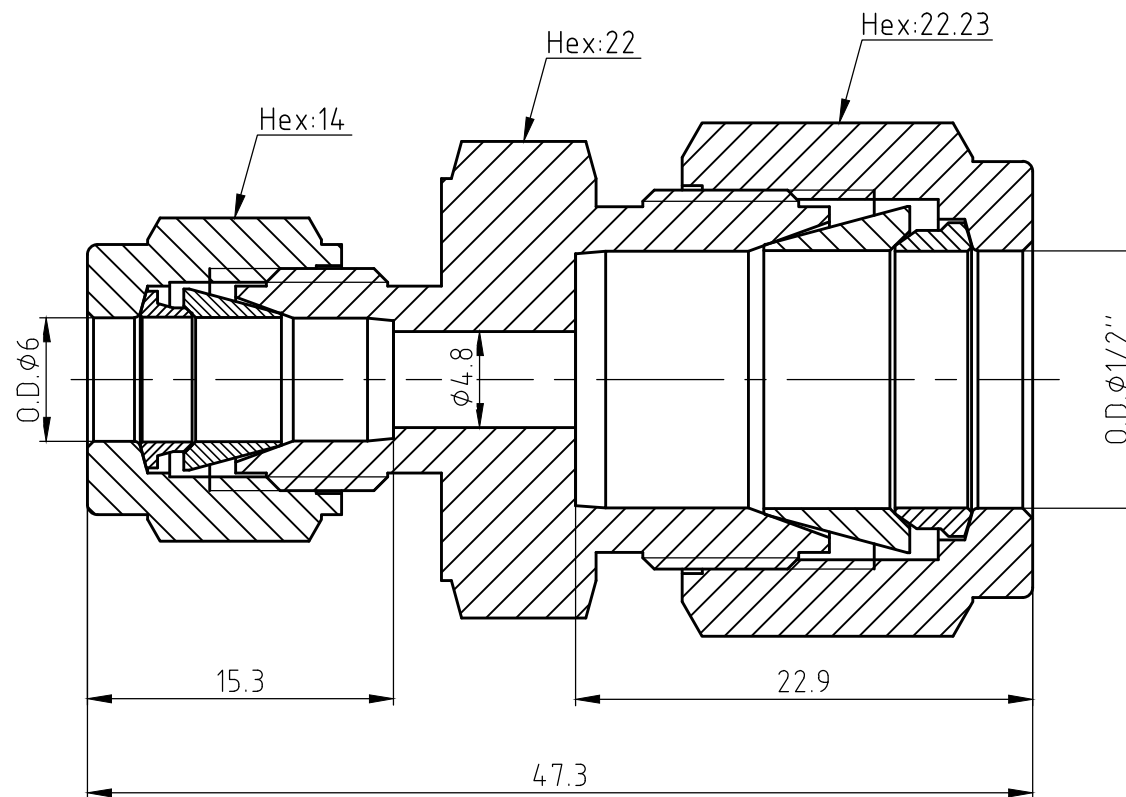

Technical Data:

Material	316 S.S./ASTM A479
----------	--------------------


A	Sep.23.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M6-U-F8-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

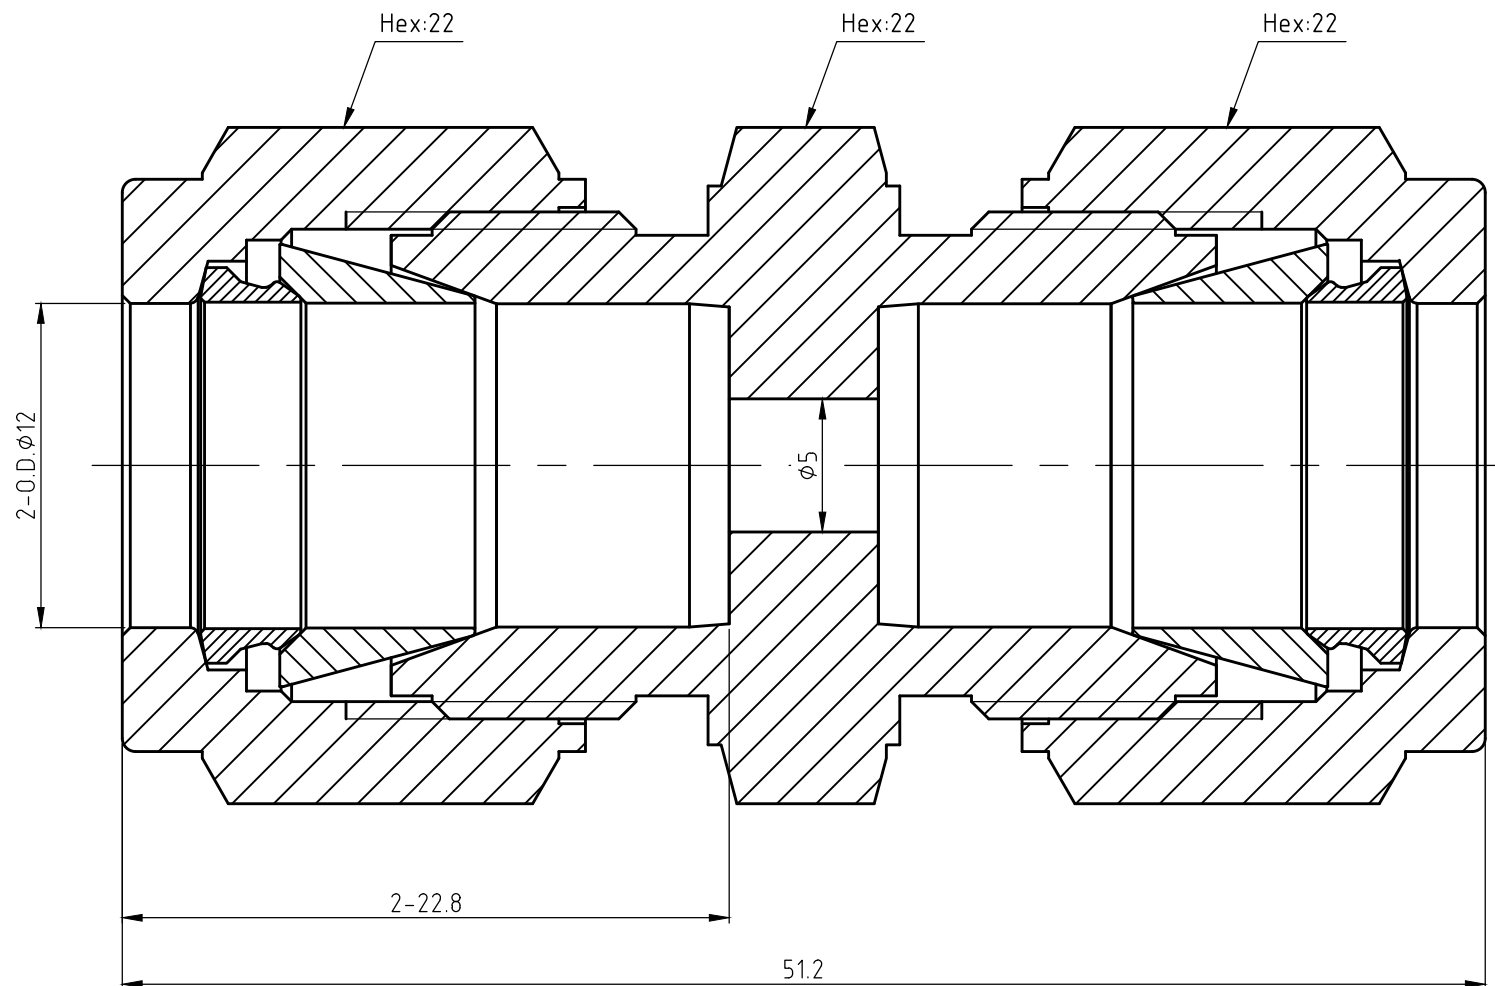

A	Nov.07.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M12-U-M12-316-H5		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

Joint Feature:

Material	316 S.S./ASTM A479
----------	--------------------

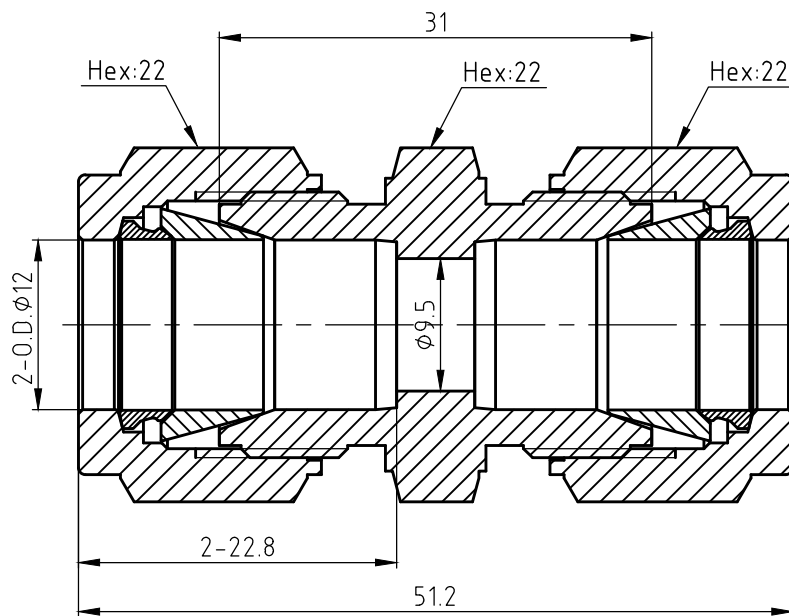

Technical Data:

Material	316L S.S/ASTM A479
----------	--------------------

A	Jan.10.2024				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M12-U-M12-316L		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		



Фитинг серии UE
ПАСПОРТ

M10-UE-M10-316



Производитель:
CIR-LOK
Китай

2023

1. НАЗНАЧЕНИЕ

Фитинги серии UE предназначены для использования в качестве соединительных элементов в гидравлических и газовых системах в различных отраслях промышленности.

2. ОСНОВНЫЕ ТЕХНИЧЕСКИЕ ДАННЫЕ

- Угольник соединительный (10 мм - 10 мм)
- Рабочая среда: Жидкость/газ
- Рабочая температура: от -200 до 690 °C
- Материал: нержавеющая сталь марки 316 (маркировка -316)
- Фитинги поставляются в сборе с передними и задними обжимными кольцами, и затяжными гайками.
- Конструкция обжимного соединения обеспечивает герметичное для жидкостей и газов соединение.
- Рабочее давление фитинга ограничивается рабочим давлением используемой импульсной трубки.

3. ПОКАЗАТЕЛИ НАДЁЖНОСТИ И БЕЗОПАСНОСТИ

- Полный срок службы (до списания): 50 лет
- Средняя наработка до отказа: 320000 часов
- Вероятность безотказной работы: 0,95
- Назначенный срок службы: 40 лет
- Назначенный ресурс: 240000 часов
- Климатическое исполнение: ХЛ1 по ГОСТ 15150-69 (Температура транспортировки и хранения от -60 до +60 °C)

4. ИСПЫТАНИЯ

Все фитинги испытываются на работоспособность и на наличие утечек.

5. ГАРАНТИЙНЫЕ ОБЯЗАТЕЛЬСТВА

На все поставляемые товары устанавливается гарантийный срок эксплуатации 36 месяцев, с даты отгрузки Товара со склада Поставщика.

Продавец гарантирует Покупателю соответствие качества поставляемого им товара стандарту качества производителя.


На данные фитинги предоставляется декларация соответствия ЕАЭС N RU Д-СН.РА02.В.49944/23

Количество: 10 шт.

Дата отгрузки: в соответствии с отгрузочными документами

Производитель: No.156 Tongxin Road, Chongzhou Economic Development Zone, Chengdu, 611200, China


Представитель производителя в РФ: ООО "ХСМЕ Рус", г. Москва,
тел. +7 (495) 646-0-999

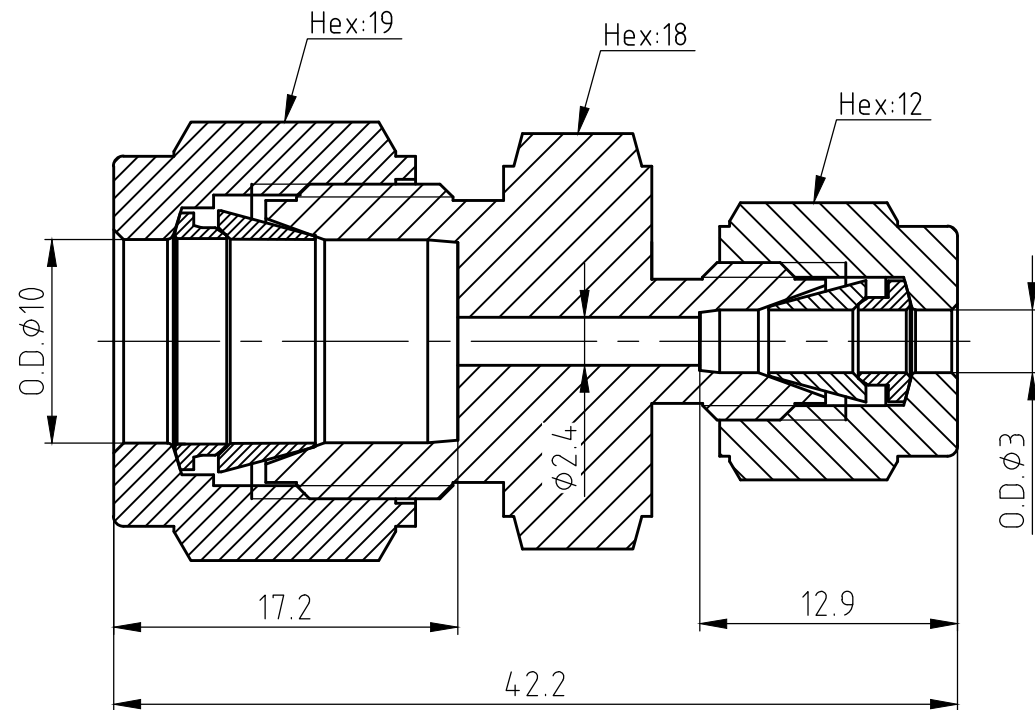

Technical Data:

Material	316 S.S./ASTM A479
----------	--------------------

A	Sep.23.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M10-U-M3-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

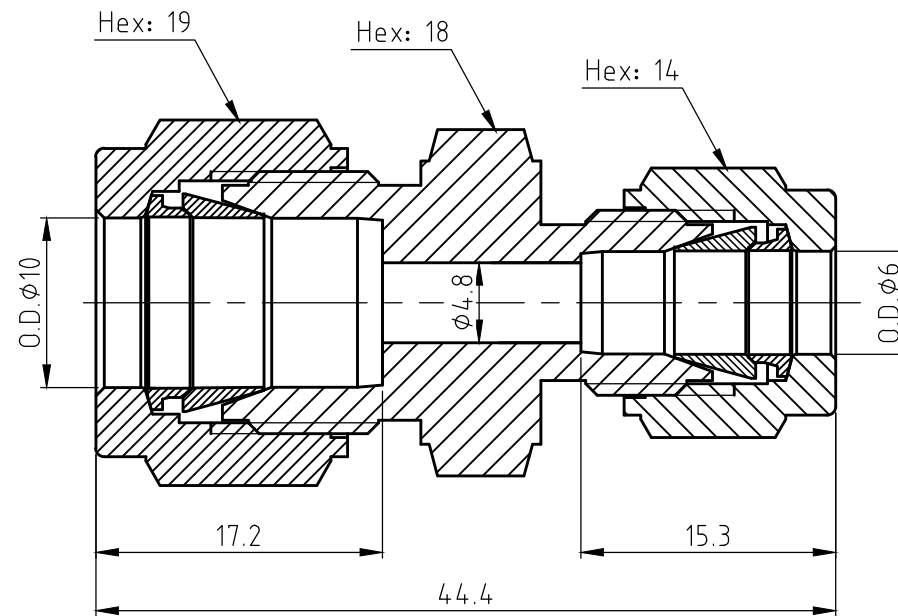

A	Feb.19.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M10-U-M6-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

Joint Feature:

Material	316 S.S./ASTM A479
----------	--------------------



Фитинг серии U ПАСПОРТ

M10-U-M6-316



Производитель:
CIR-LOK
Китай

2023

1. НАЗНАЧЕНИЕ

Фитинги серии U предназначены для использования в качестве соединительных элементов в гидравлических и газовых системах в различных отраслях промышленности.

2. ОСНОВНЫЕ ТЕХНИЧЕСКИЕ ДАННЫЕ

- Муфта соединительная (10 мм - 6 мм)
- Рабочая среда: Жидкость/газ
- Рабочая температура: от -200 до 690 °C
- Материал: нержавеющая сталь марки 316 (маркировка -316)
- Фитинги поставляются в сборе с передними и задними обжимными кольцами и затяжными гайками.
- Конструкция обжимного соединения обеспечивает герметичное для жидкостей и газов соединение.
- Рабочее давление фитинга ограничивается рабочим давлением используемой импульсной трубки.

3. ПОКАЗАТЕЛИ НАДЁЖНОСТИ И БЕЗОПАСНОСТИ

- Полный срок службы (до списания): 50 лет
- Средняя наработка до отказа: 320000 часов
- Вероятность безотказной работы: 0,95
- Назначенный срок службы: 40 лет
- Назначенный ресурс: 240000 часов
- Климатическое исполнение: ХЛ1 по ГОСТ 15150-69 (Температура транспортировки и хранения от -60 до +60 °C)

4. ИСПЫТАНИЯ

Все фитинги испытываются на работоспособность и на наличие утечек.

5. ГАРАНТИЙНЫЕ ОБЯЗАТЕЛЬСТВА

На все поставляемые товары устанавливается гарантийный срок эксплуатации 36 месяцев, с даты отгрузки Товара со склада Поставщика.

Продавец гарантирует Покупателю соответствие качества поставляемого им товара стандарту качества производителя.


На фитинги предоставляется декларация соответствия ЕАЭС N RU Д-СН.РА02.В.49944/23

Количество: 2 шт.

Дата отгрузки: в соответствии с отгрузочными документами

Производитель: No.156 Tongxin Road, Chongzhou Economic Development Zone, Chengdu, 611200, China


Представитель производителя в РФ: ООО "ХСМЕ Рус", г. Москва,
тел. +7 (495) 646-0-999

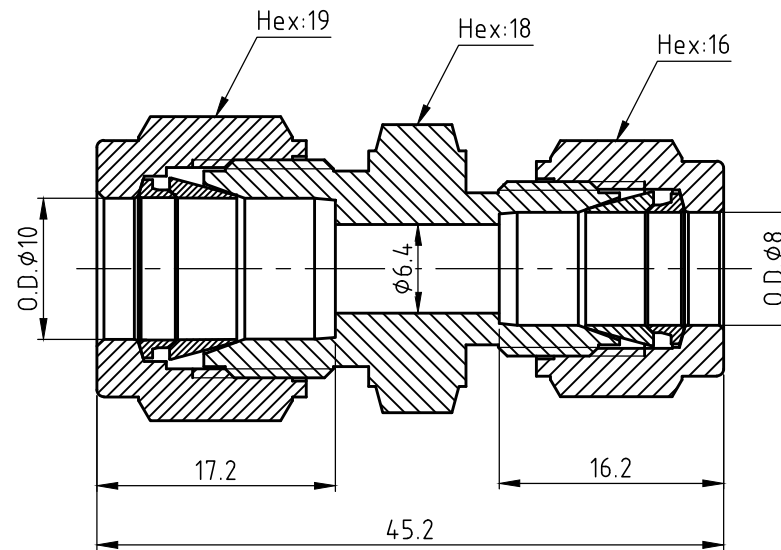

Technical Data:

Material	316 S.S./ASTM A479
----------	--------------------

A	Sep.21.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M10-U-M8-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

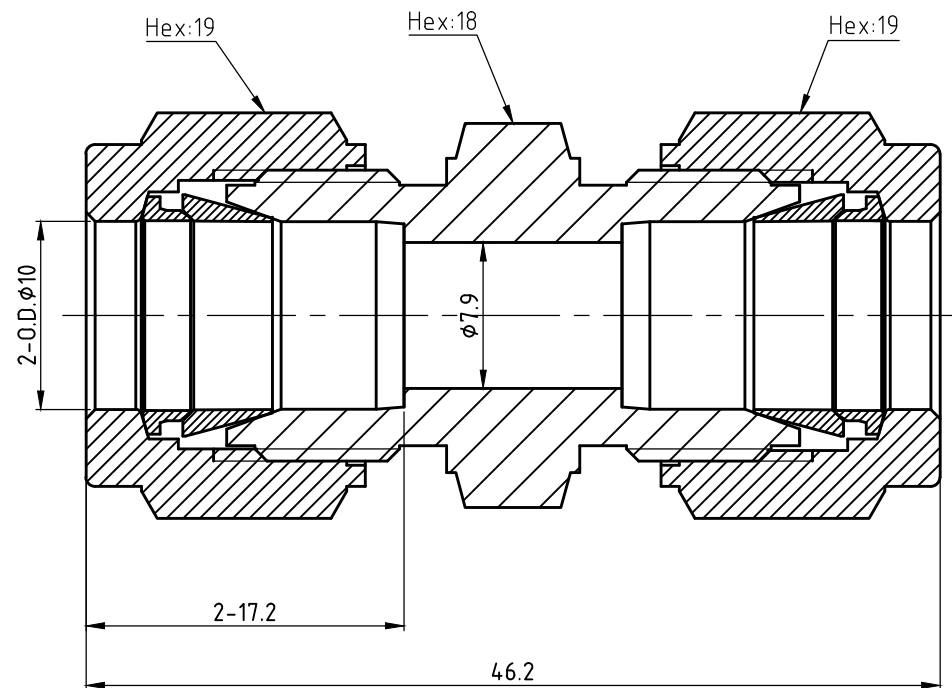

Joint Feature:

Material	316 S.S/ASTM A479
Max working pressure	8410Psi (580bar)

A	Feb.08.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M10-U-M10-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		



Фитинг серии U ПАСПОРТ

M10-U-M10-316



Производитель:
CIR-LOK
Китай

2023

1. НАЗНАЧЕНИЕ

Фитинги серии U предназначены для использования в качестве соединительных элементов в гидравлических и газовых системах в различных отраслях промышленности.

2. ОСНОВНЫЕ ТЕХНИЧЕСКИЕ ДАННЫЕ

- Муфта соединительная (10 мм)
- Рабочая среда: Жидкость/газ
- Рабочая температура: от -200 до 690 °C
- Материал: нержавеющая сталь марки 316 (маркировка -316)
- Фитинги поставляются в сборе с передними и задними обжимными кольцами и затяжными гайками.
- Конструкция обжимного соединения обеспечивает герметичное для жидкостей и газов соединение.
- Рабочее давление фитинга ограничивается рабочим давлением используемой импульсной трубки.

3. ПОКАЗАТЕЛИ НАДЁЖНОСТИ И БЕЗОПАСНОСТИ

- Полный срок службы (до списания): 50 лет
- Средняя наработка до отказа: 320000 часов
- Вероятность безотказной работы: 0,95
- Назначенный срок службы: 40 лет
- Назначенный ресурс: 240000 часов
- Климатическое исполнение: ХЛ1 по ГОСТ 15150-69 (Температура транспортировки и хранения от -60 до +60 °C)

4. ИСПЫТАНИЯ

Все фитинги испытываются на работоспособность и на наличие утечек.

5. ГАРАНТИЙНЫЕ ОБЯЗАТЕЛЬСТВА

На все поставляемые товары устанавливается гарантийный срок эксплуатации 36 месяцев, с даты отгрузки Товара со склада Поставщика.

Продавец гарантирует Покупателю соответствие качества поставляемого им товара стандарту качества производителя.


На фитинги предоставляется декларация соответствия ЕАЭС N RU Д-СН.РА02.В.49944/23

Количество: 5 шт.

Дата отгрузки: в соответствии с отгрузочными документами

Производитель: No.156 Tongxin Road, Chongzhou Economic Development Zone, Chengdu, 611200, China

Представитель производителя в РФ: ООО "ХСМЕ Рус", г. Москва,
тел. +7 (495) 646-0-999

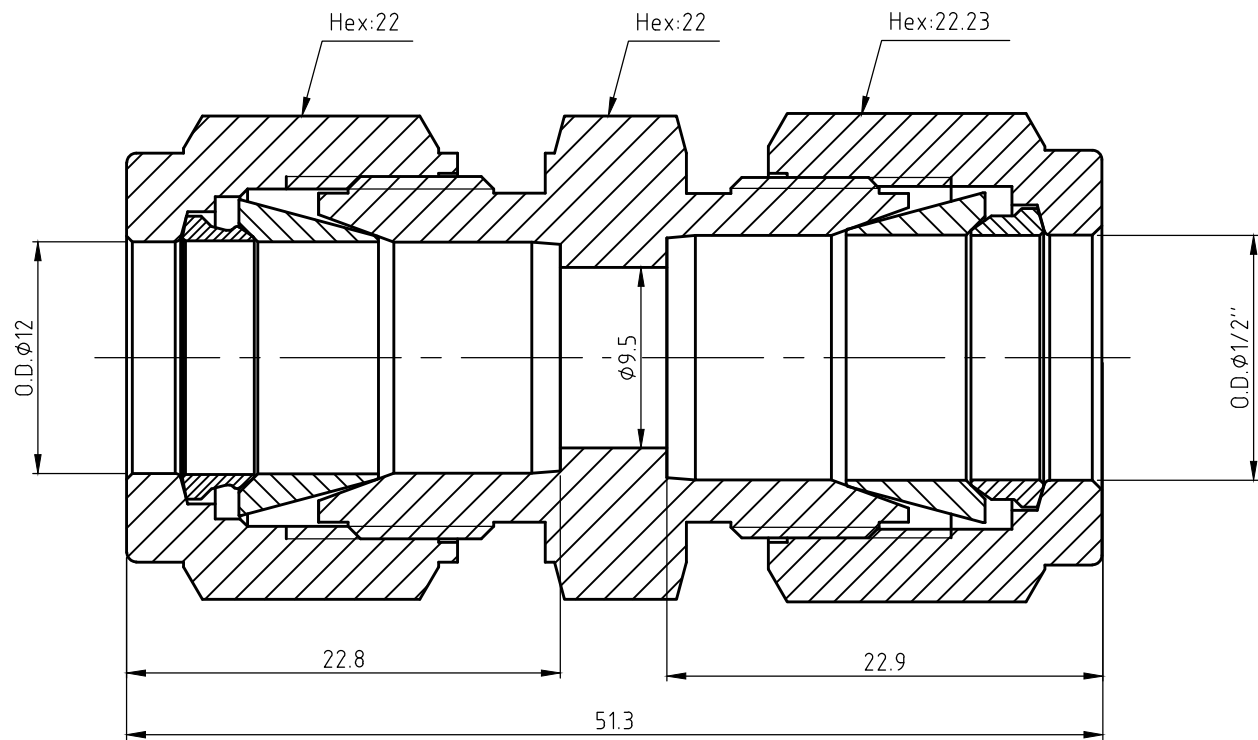


Joint Feature:

Material

316 S.S./ASTM A479


A	Feb.22.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M12-U-F8-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

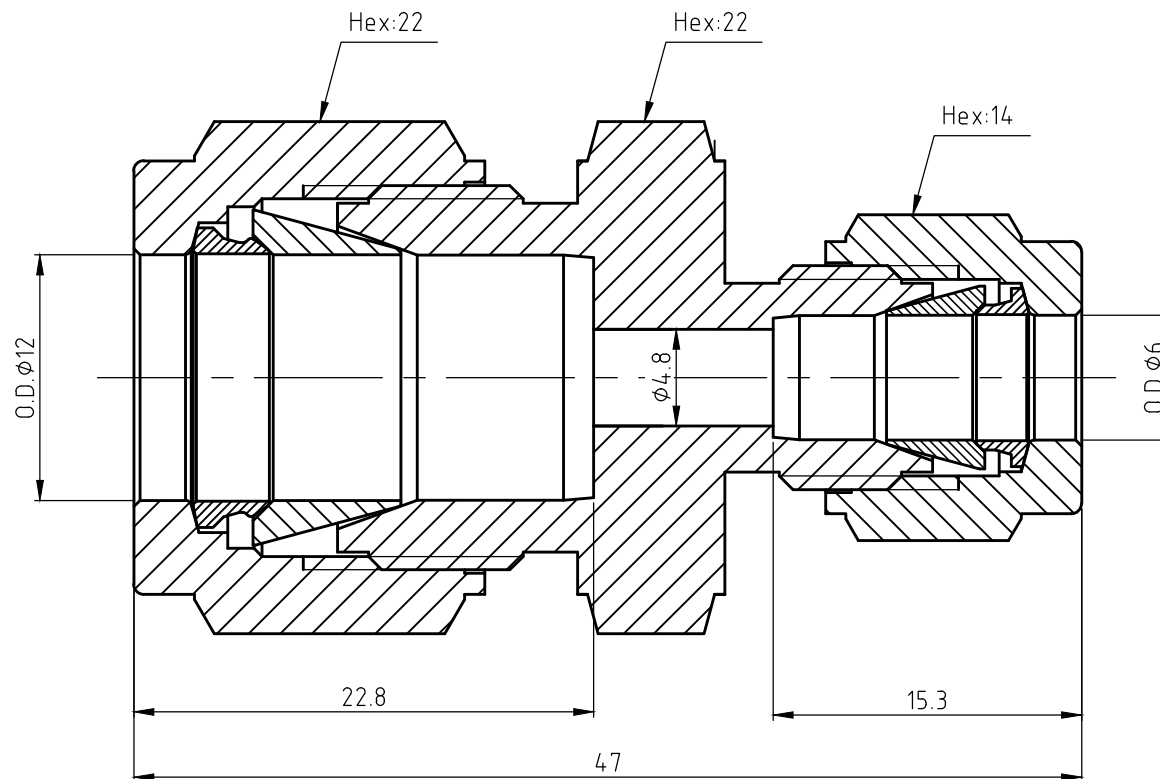


A	Jul.19.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M12-U-M6-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

Joint Feature:

Material	316 S.S./ASTM A479
----------	--------------------

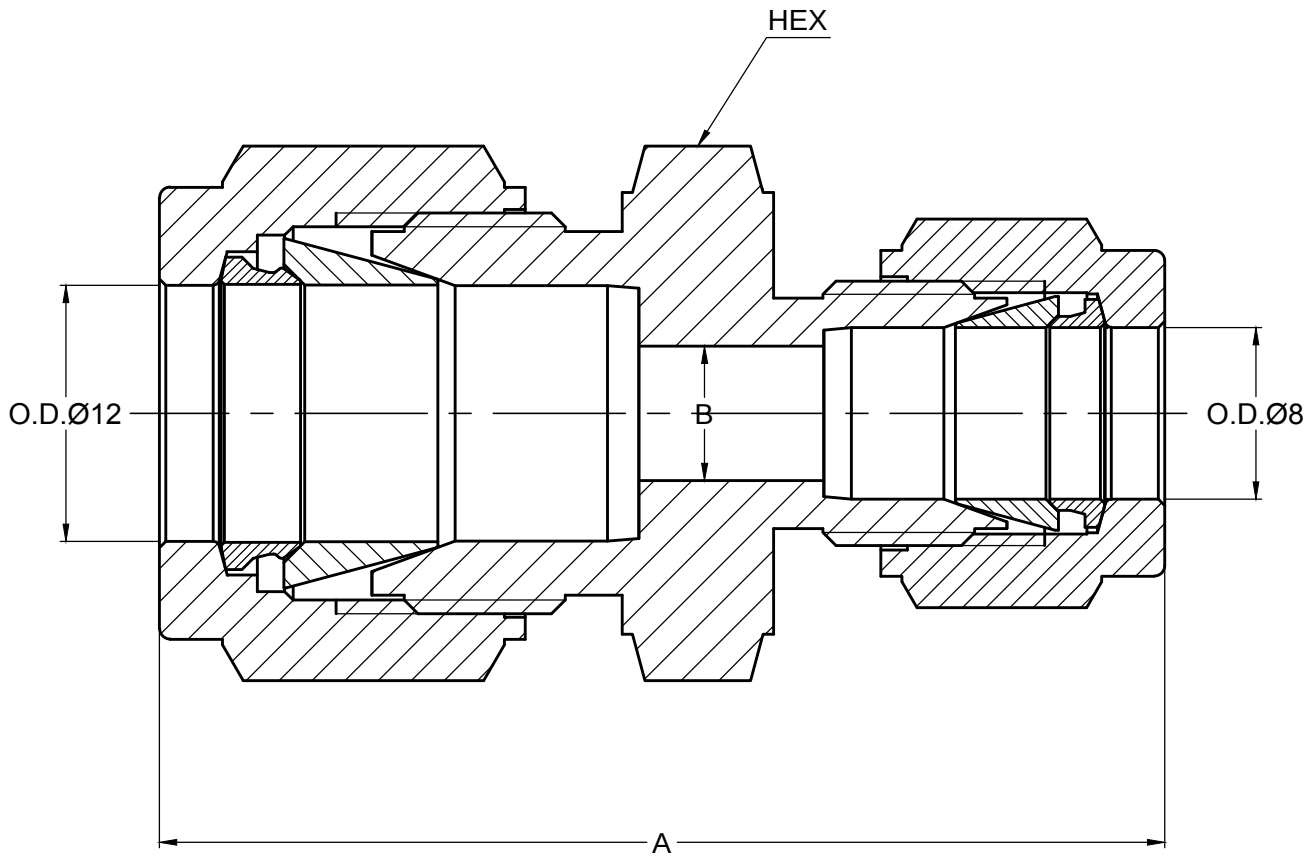


Ordering Number	Valve Material Grade /ASTM Specification	Dimensions in. (mm)			
		A	B	C	HEX
M12-U-M8-316	316 S.S. /A479	1.88 (47.8)	0.25 (6.4)		0.87 (22)
		D	E	F	G

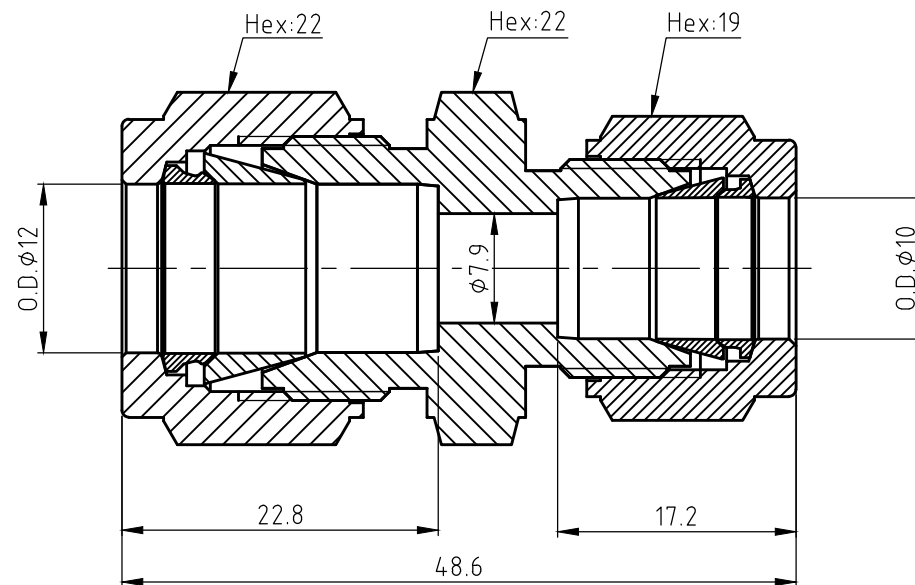

Technical Data:

Material	316 S.S./ASTM A479
----------	--------------------


A	Sep.21.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M12-U-M10-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

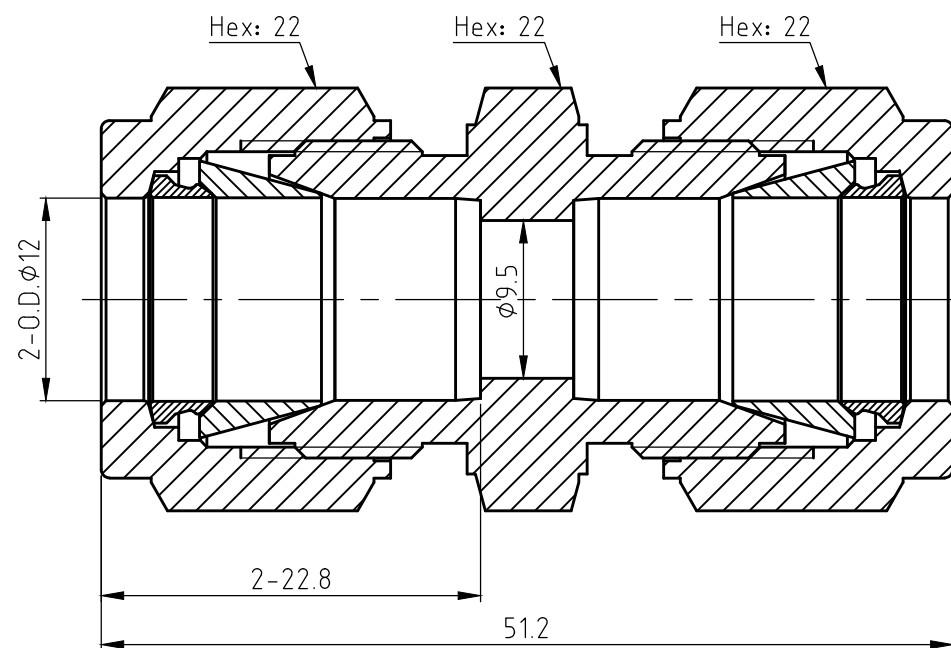

Joint Feature:

Material	316 SS/ASTM A479
Max.working pressure	6800Psi (467Bar)
Temperature range	-325°F-1000°F(-198℃-537℃)


A	Mar.21.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M12-U-M12-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

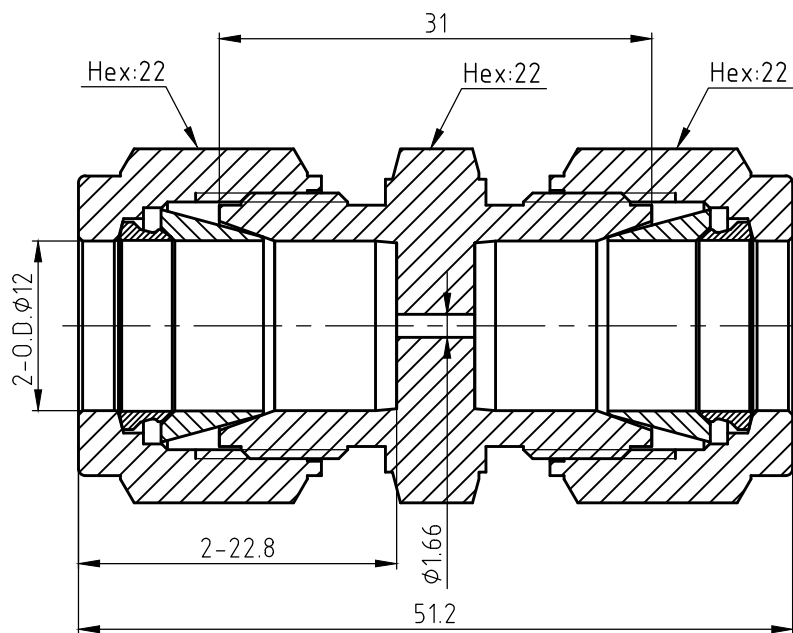

Technical Data:

Material	316 S.S/ASTM A479
----------	-------------------


A	Mar.07.2024				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M12-U-M12-316-H1.66		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

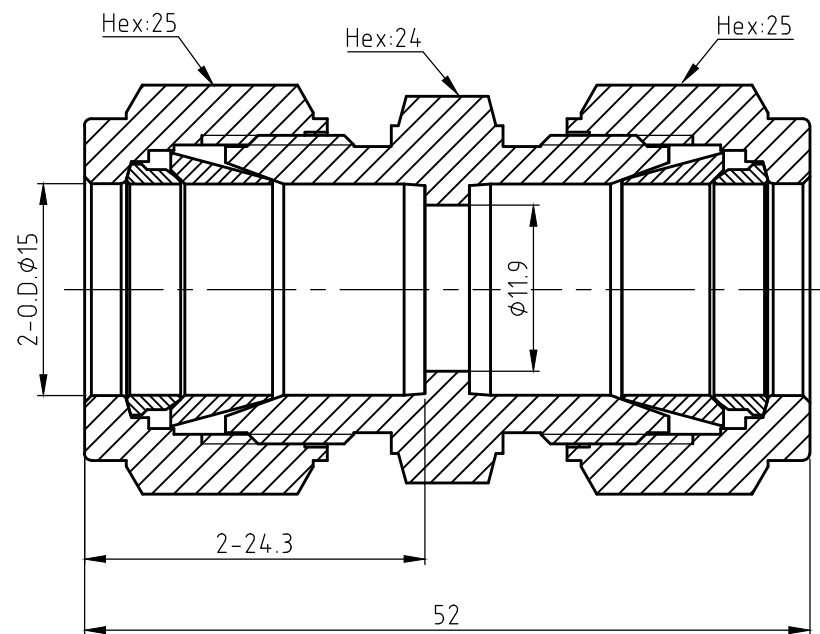

Joint Feature:

Material	316 S.S./ASTM A479
----------	--------------------


A	Nov.13.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M15-U-M15-316		
Format	A4	Unit	mm	View	
Scale	Not 3:1	Page	1 of 1		

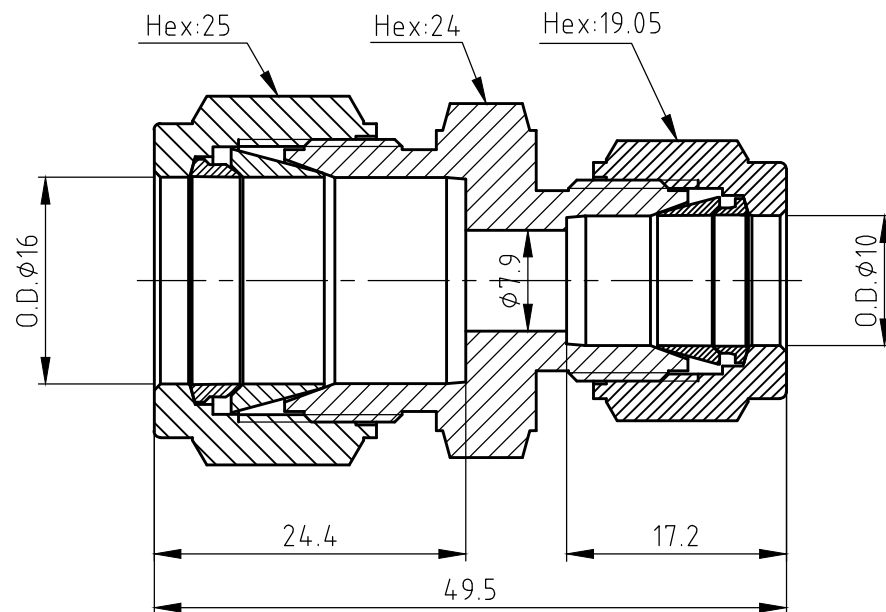

Joint Feature:

Material	316 S.S/ASTM A479
----------	-------------------


A	Oct.06.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M16-U-M10-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

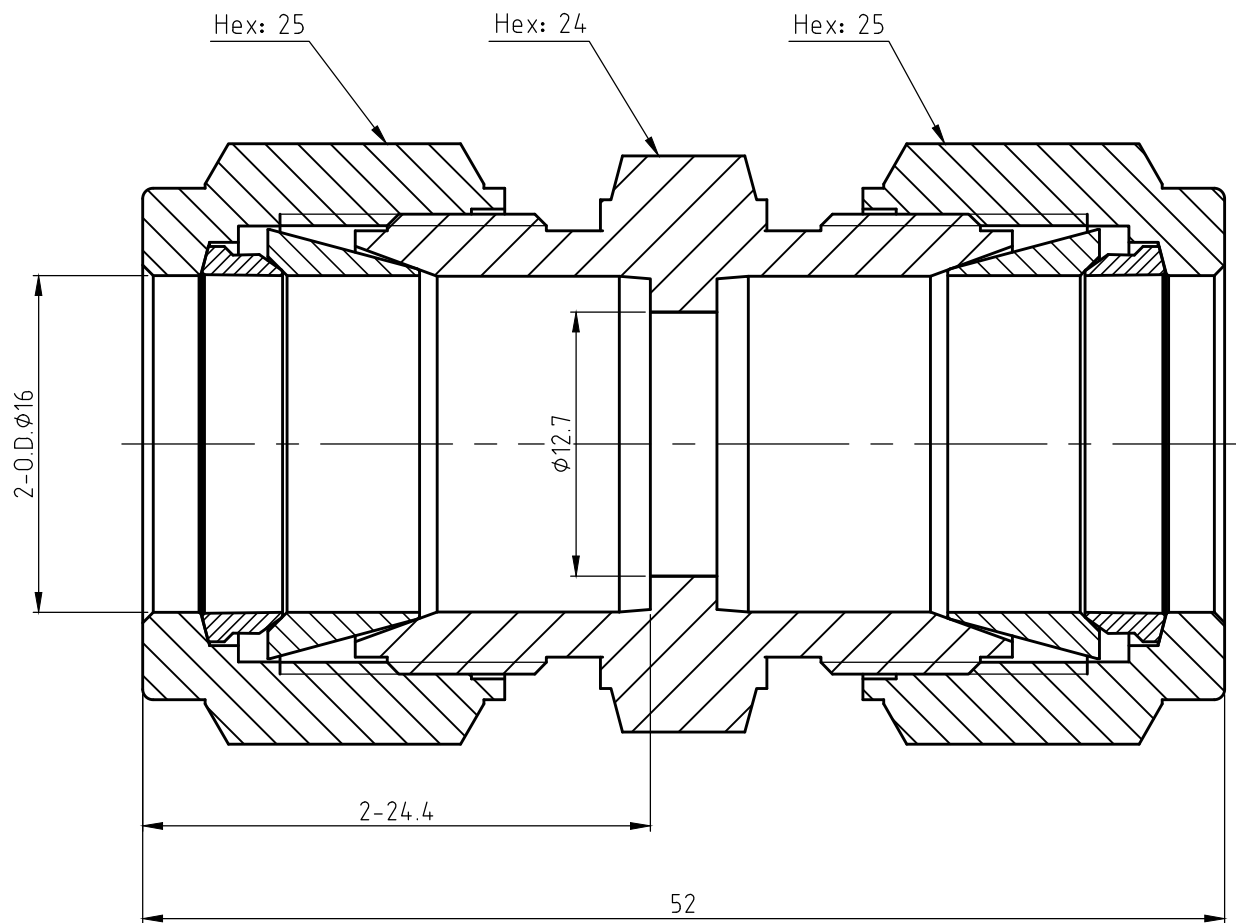

Technical Data:

Material	316 S.S./ASTM A479
----------	--------------------


A	Jun.17.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M16-U-M16-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

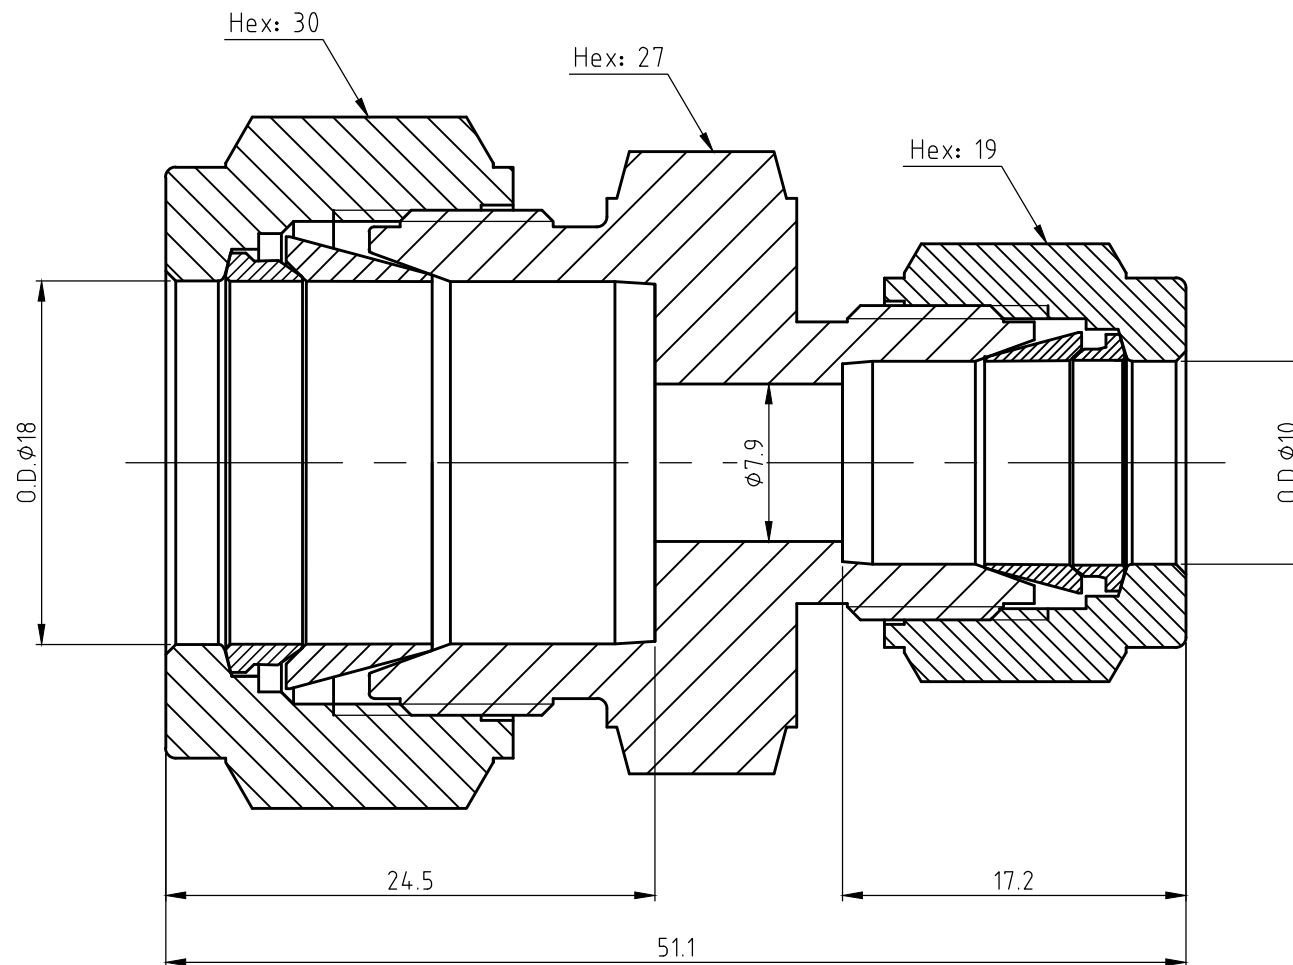

A	Feb.03.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M18-U-M10-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

Joint Feature:


Material	316 S.S./ASTM A479
----------	--------------------

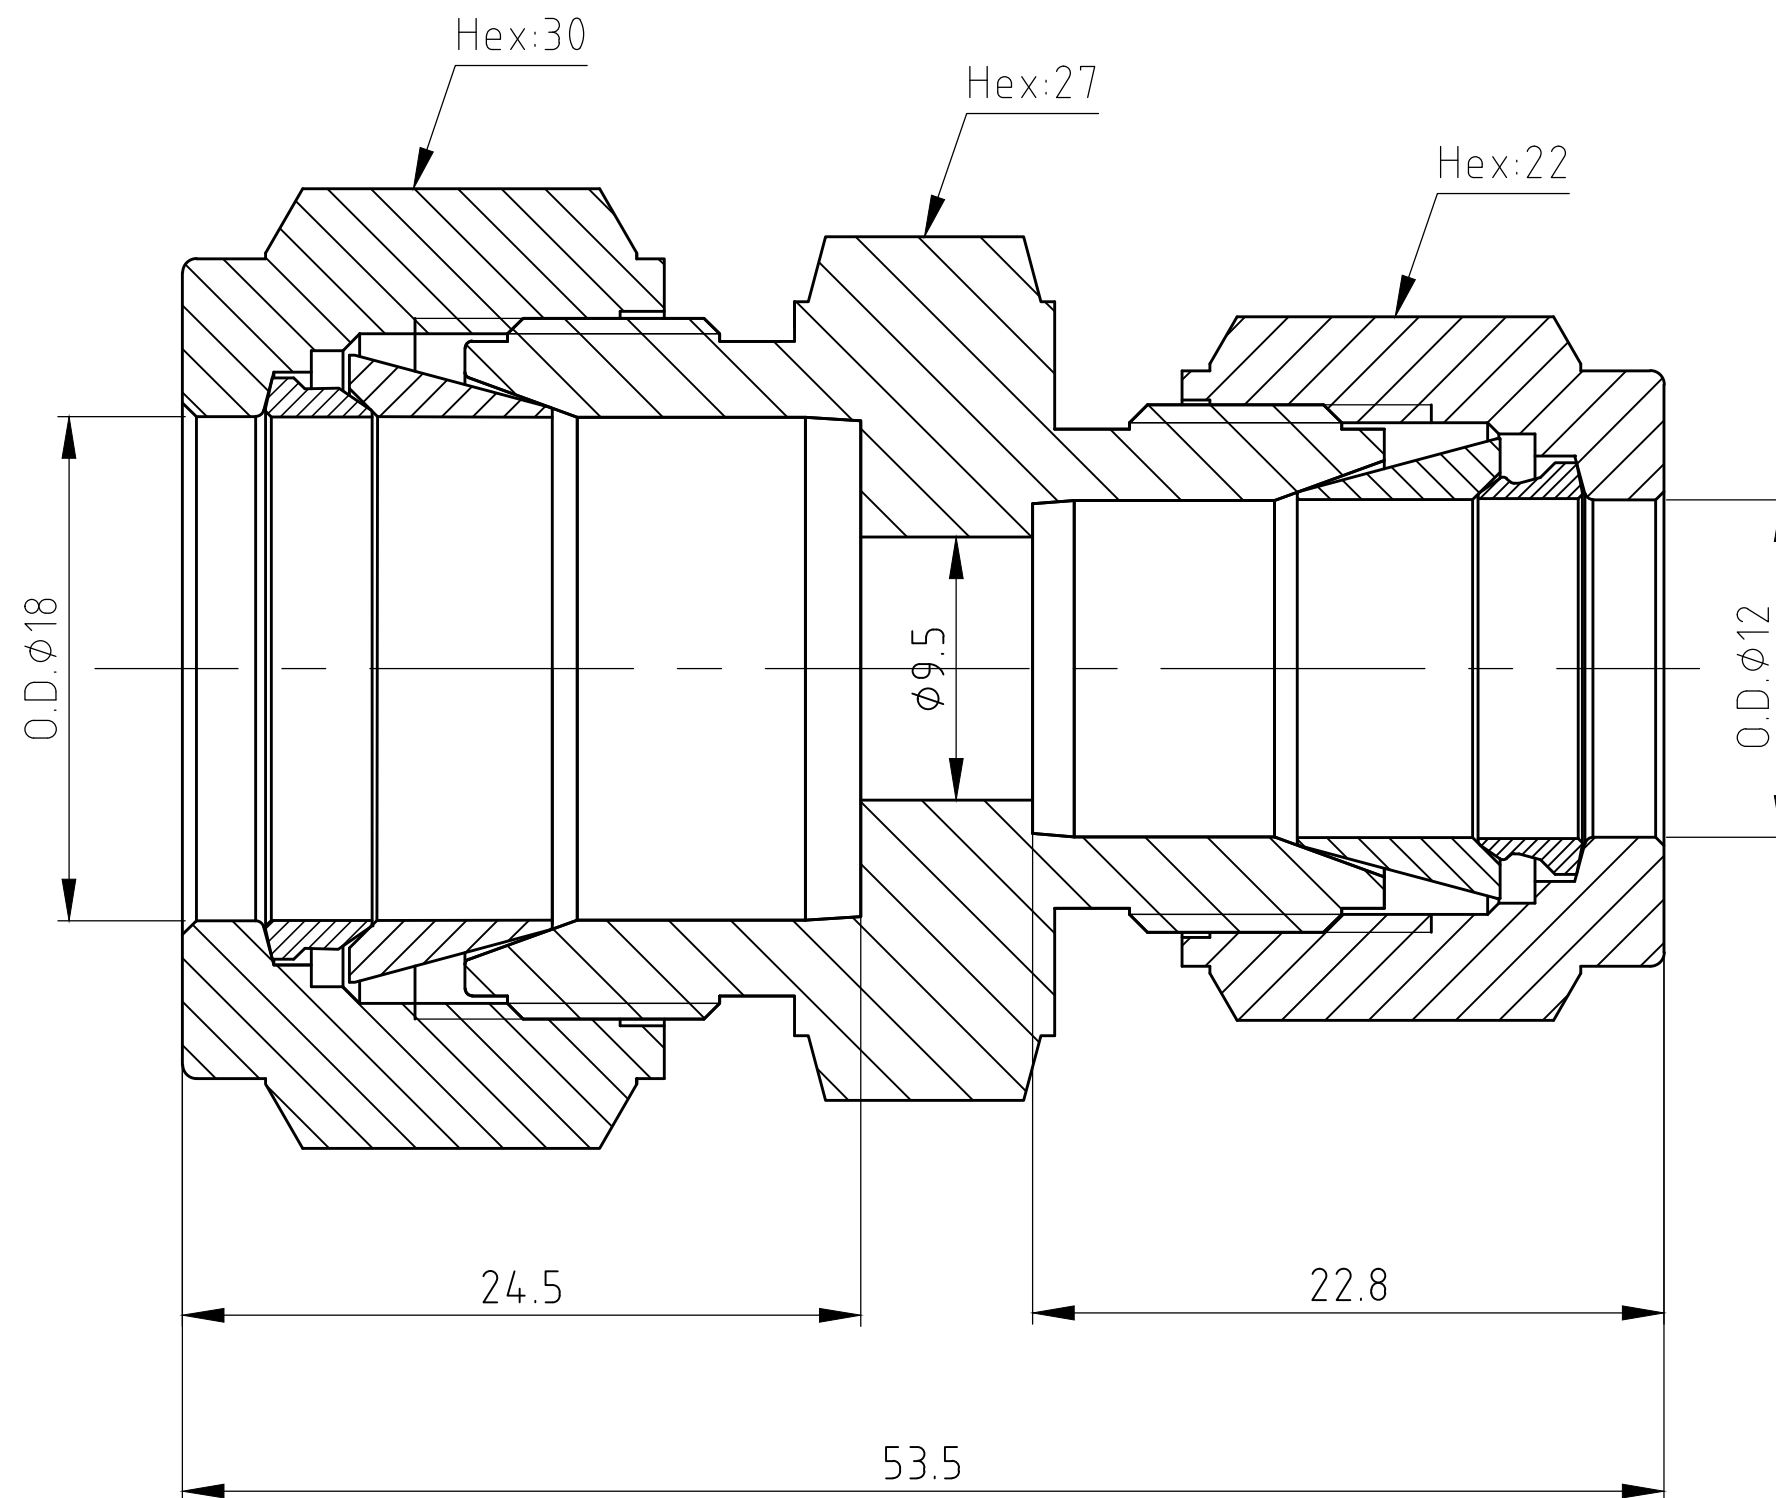

A	Feb.27.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M18-U-M12-316		
Format	A4	Unit	mm	View	
Scale	Not 3:1	Page	1 of 1		

Joint Feature:


Material	316 S.S./ASTM A479
----------	--------------------

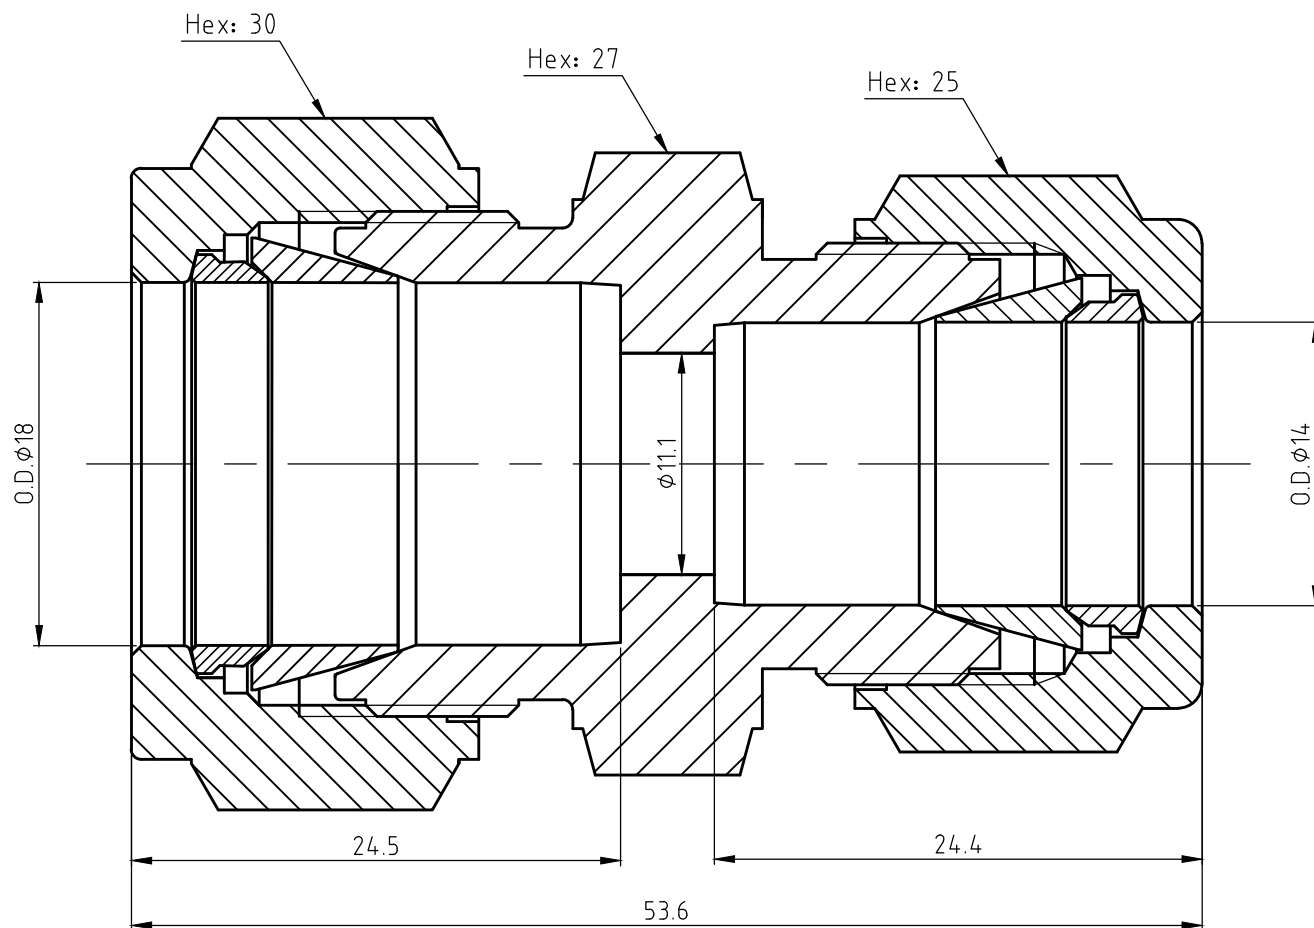

A	Feb.06.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M18-U-M14-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

Joint Feature:


Material	316 S.S./ASTM A479
----------	--------------------

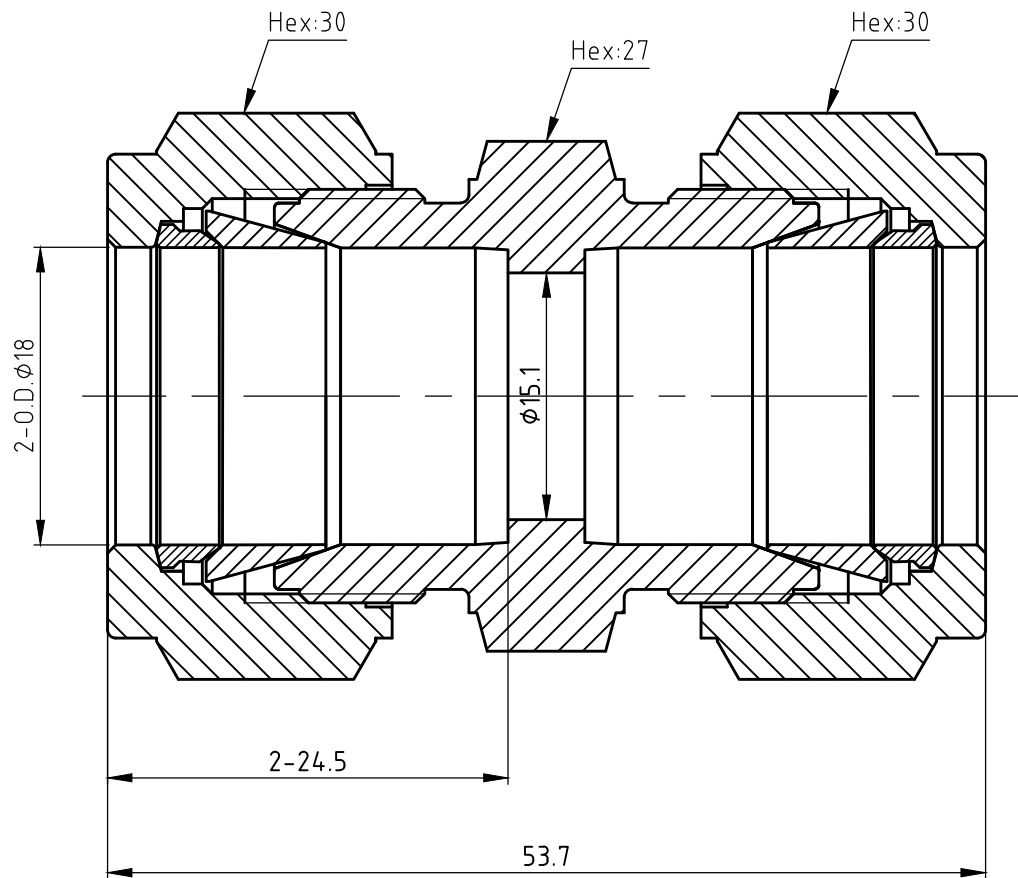

Joint Feature:

Material	316 S.S./ASTM A479
----------	--------------------


A	Feb.27.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M18-U-M18-316		
Format	A4	Unit	mm	View	
Scale	Not 3:1	Page	1 of 1		

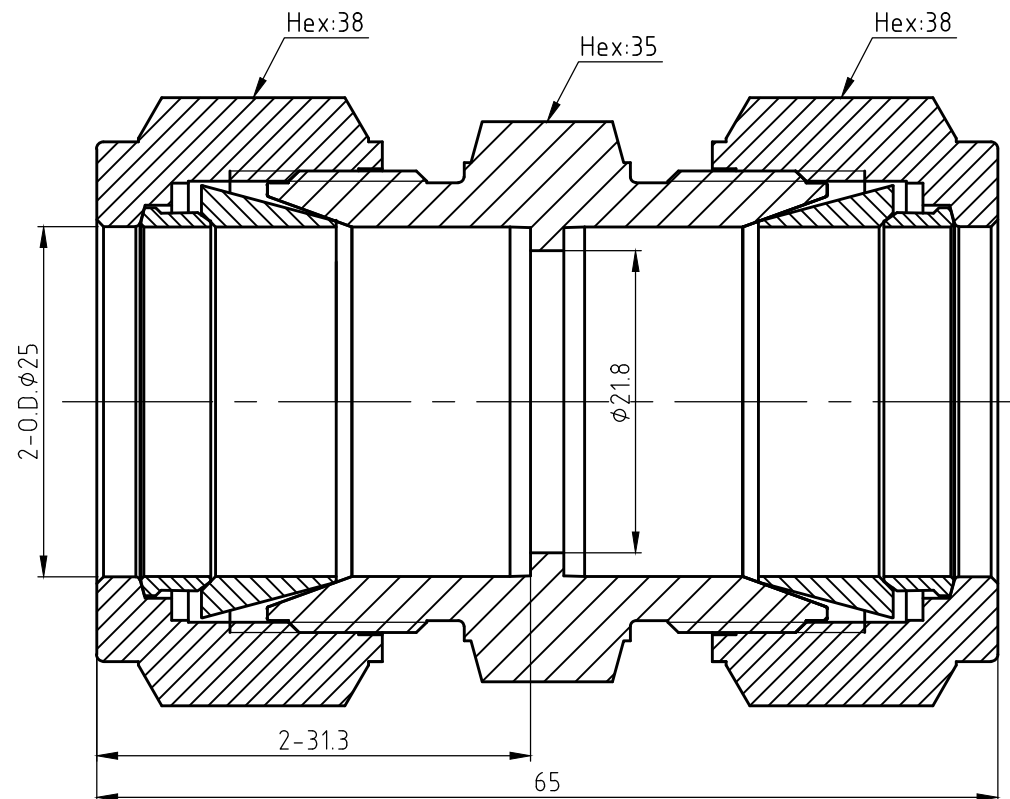

Joint Feature:

Material	316 S.S./ASTM A479
Max.WP	3340 Psi (230 Bar)
Temperature range	-65°F-450°F (-54°C-232°C)


A	Jul.29.2021				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M25-U-M25-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

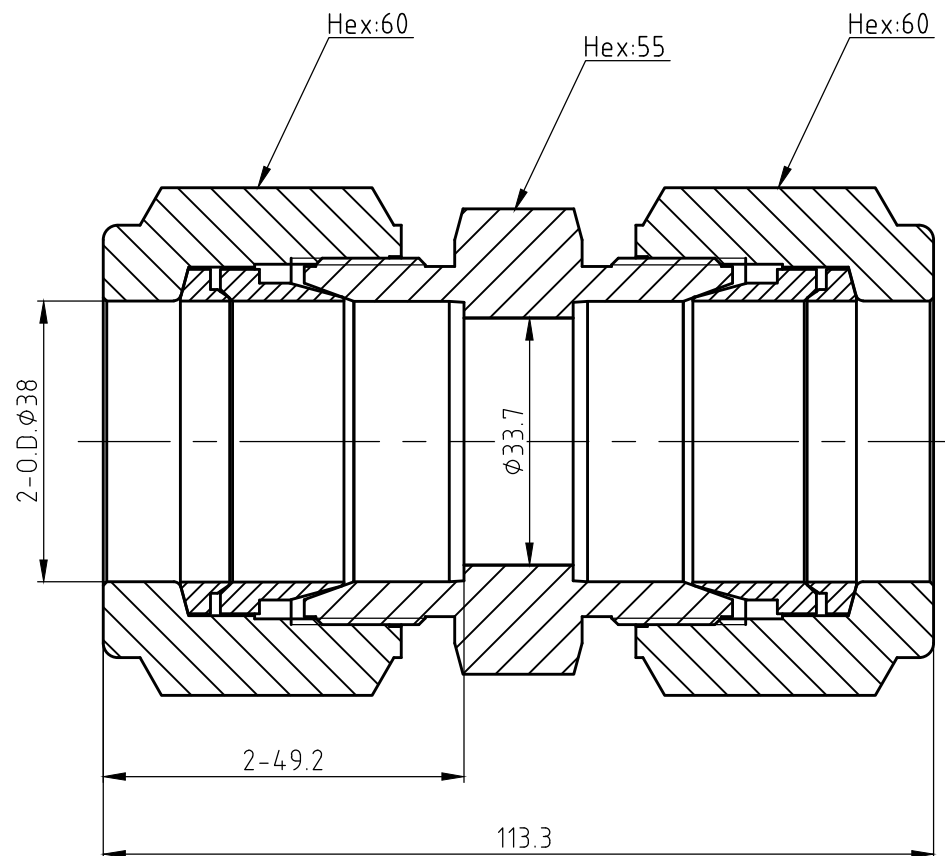

Technical Data:

Material	316 S.S./ASTM A479
----------	--------------------


A	Jan.16.2024				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M38-U-M38-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

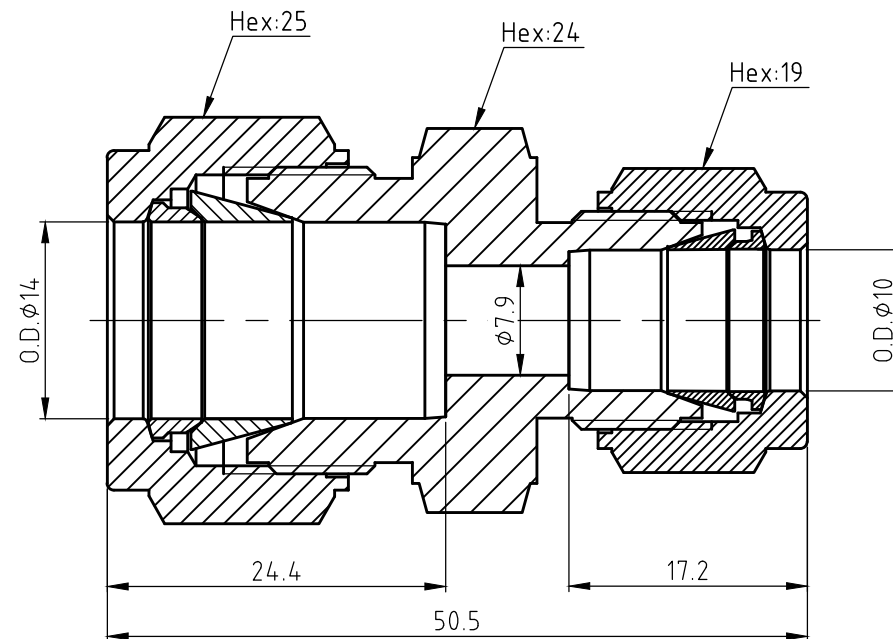

A	Oct.31.2022				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M14-U-M10-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

Joint Feature:


Material	316 S.S./ASTM A479
----------	--------------------

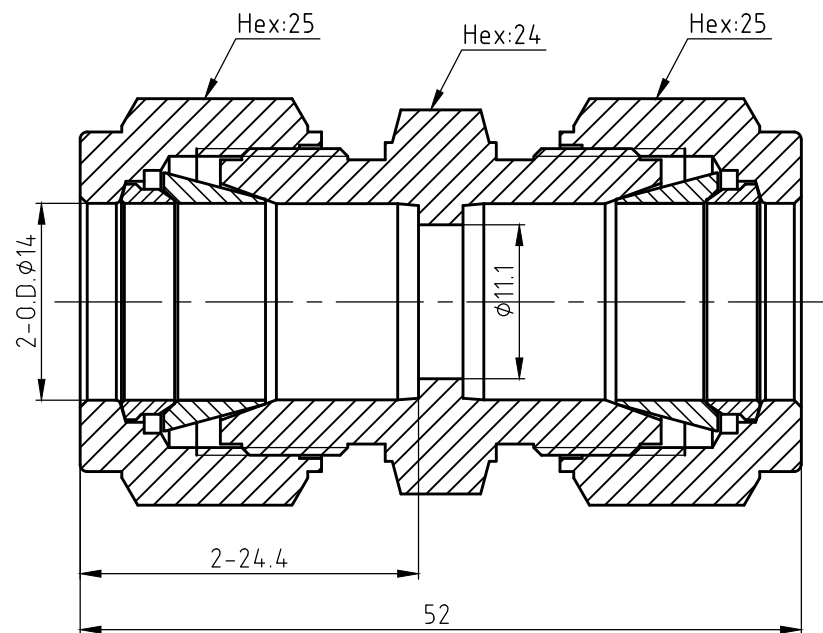

Technical Data:

Material	316 S.S/ASTM A479
----------	-------------------


A	Sep.08.2021				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M14-U-M14-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

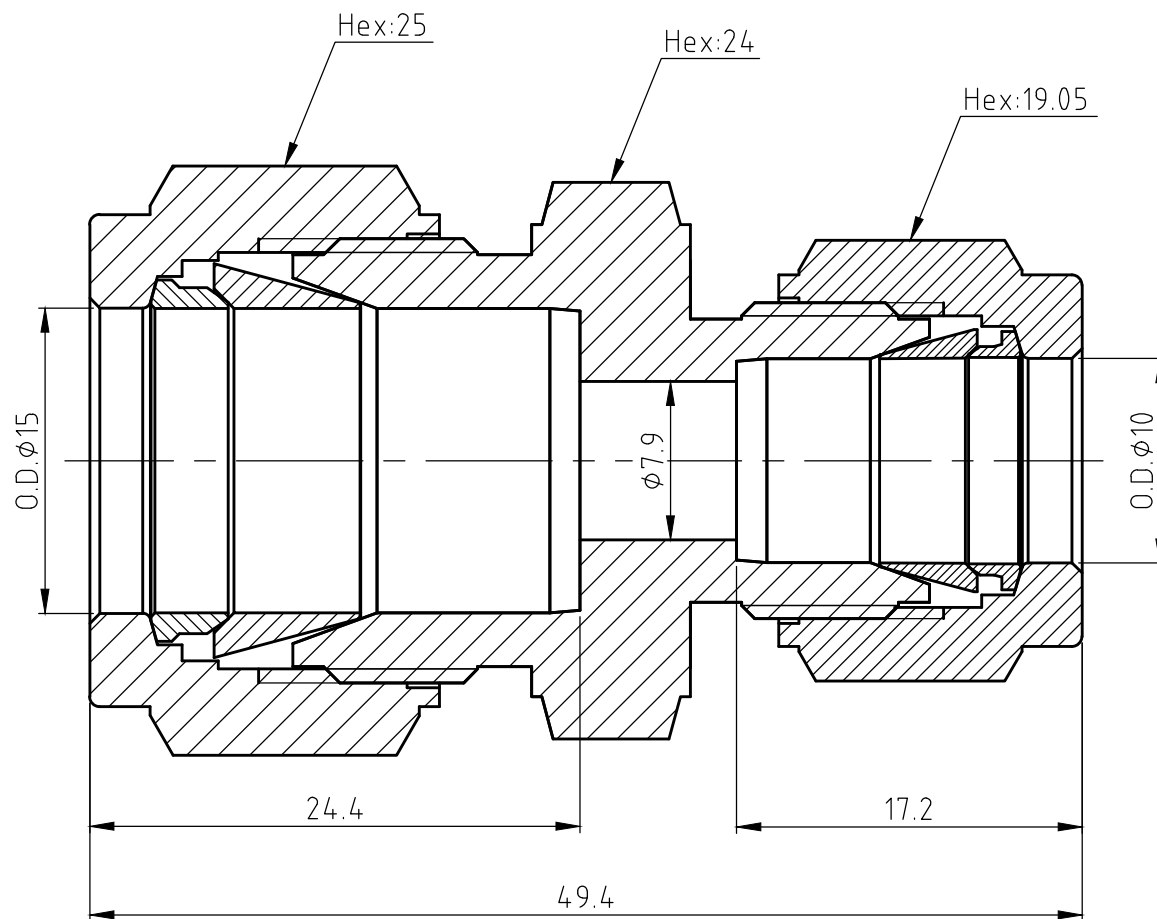

Technical Data:

Material	316 S.S./ASTM A479
Temperature(F°/C°)	-65 (-53) to 1000 (537)
Working pressure (psig/bar)	5800 (400)

A	Apr.27.2025				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M15-U-M10-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		

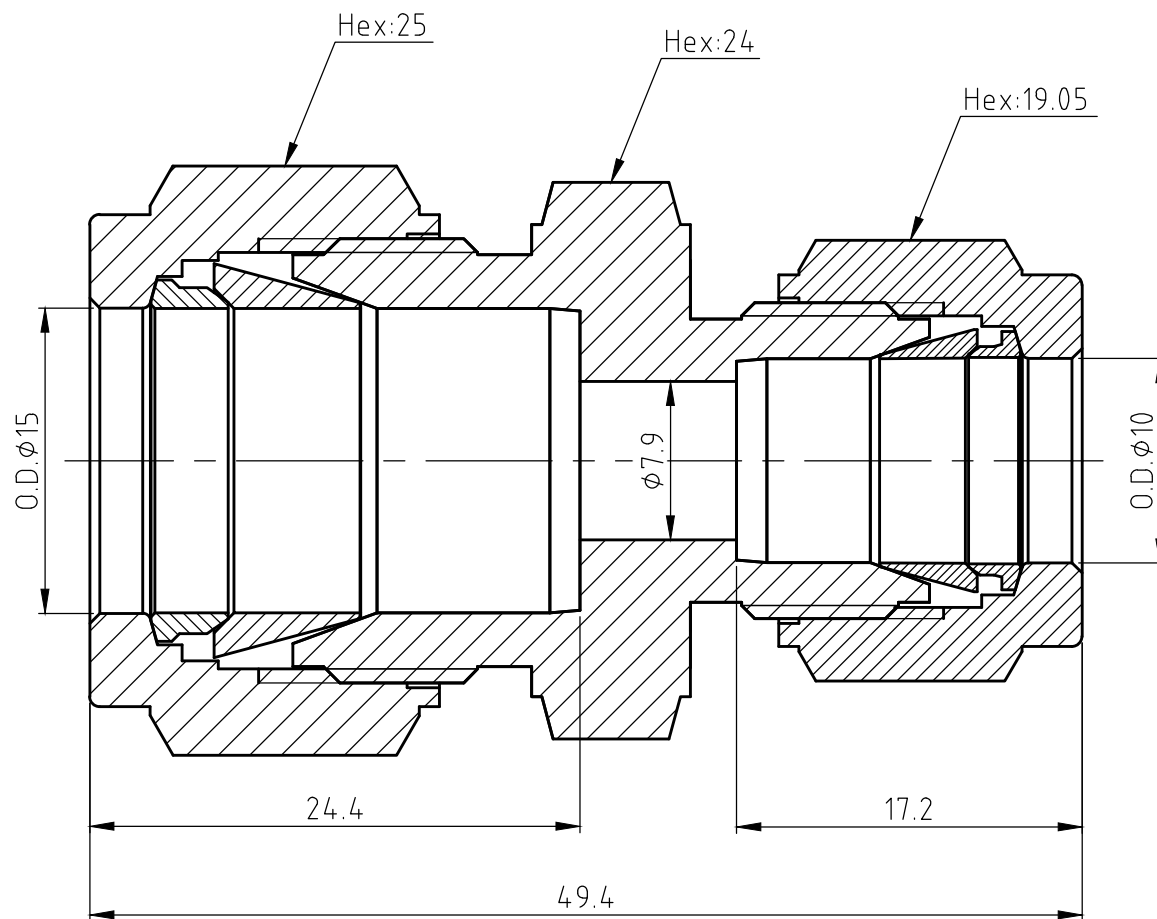

Technical Data:

Material	316 S.S./ASTM A479
----------	--------------------

A	Apr.25.2025				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Fittings		
		Model	M15-U-M10-316		
Format	A4	Unit	mm	View	
Scale	Not 1:1	Page	1 of 1		