


Component		Material Grade
1	Body	316 S.S./ASTM A479
2	Stem	630 S.S./ASTM A564
3	Packing	PTFE
4	Packing ring	316 S.S./ASTM A479
5	Bonnet	C36000/ASTM B16
6	Bracket	304 S.S.
7	Nut	316 S.S./ASTM A479
8	Cylinder	6061
9	Indicate	304 S.S.
10	Lock Hoop	304 S.S.

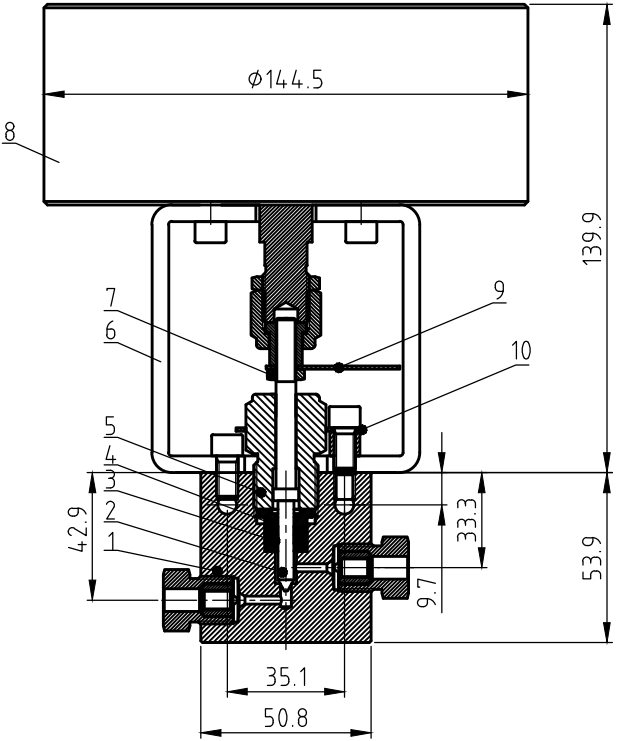


Technical Data:

Max. WP	60000psig(4138bar)
Temperature	-100 to 450°F (-73 to 232°C)
Orifice Size	0.063in (1.6mm)
Inlet Size	O.D. ϕ 1/4"
Outlet Size	O.D. ϕ 1/4"
Block Thickness	1.00in (25.4mm)
Air Inlet Size	R 1/8"
Drive Pressure	60-100psig

A	Oct.16.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Needle valve		
		Model	60NV-HPF4-NO-316		
Format	A4	Unit	in/mm	View	
Scale	Not 1:1	Page	1 of 1		

Technical Data:

Max. WP	60000psig(4138bar)
Temperature	-100 to 450°F (-73 to 232°C)
Orifice Size	0.063in (1.6mm)
Inlet Size	O.D.ϕ 1/4"
Outlet Size	O.D.ϕ 1/4"
Block Thickness	1.00in (25.4mm)
Air Inlet Size	R 1/8"

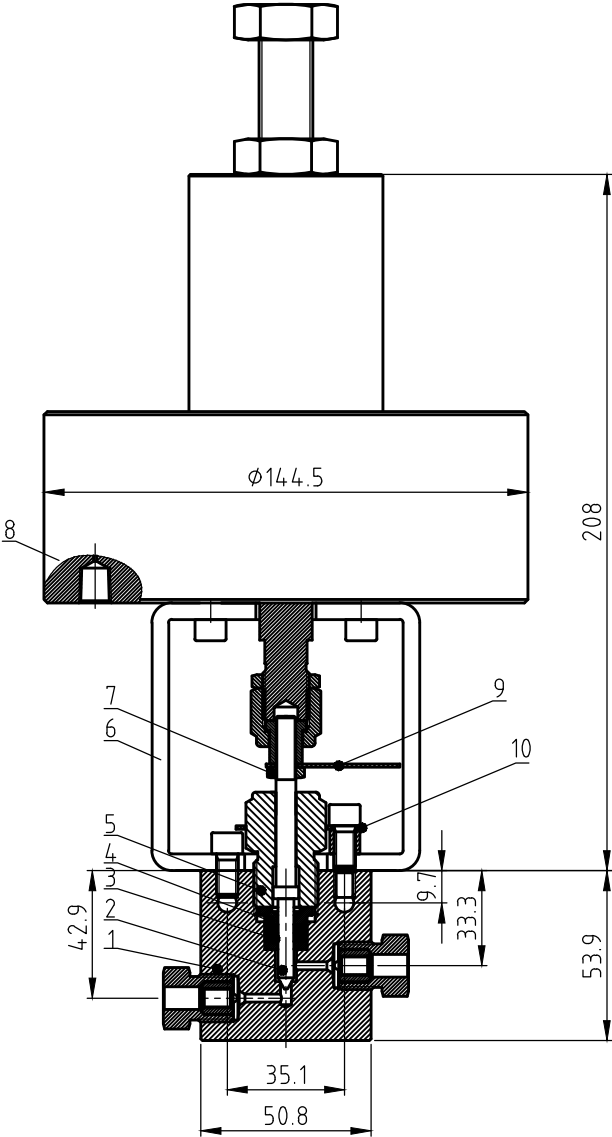

Component		Material Grade
1	Body	316 S.S./ASTM A479
2	Stem	630 S.S./ASTM A564
3	Packing	PTFE
4	Packing ring	316 S.S./ASTM A479
5	Bonnet	C36000/ASTM B16
6	Bracket	304 S.S.
7	Nut	316 S.S./ASTM A479
8	Cylinder	6061
9	Indicate	304 S.S.
10	Lock Hoop	304 S.S.

A	Sep.25.2023				YES
REV	Revision Date	Created	Checked	Approved	Status
CIR-LOK		Title	Needle valve		
		Model	60NV-HPF4-NC-316		
Format	A4	Unit	in/mm	View	
Scale	Not 1:1	Page	1 of 1		